

LOC/DME I-DJK 109.95 Chan 36 (Y)	APP CRS 022°	Rwy Ldg 7026	TDZE 913
		Apt Elev 913	

ILS or LOC RWY 2

DE KALB TAYLOR MUNI (DKB)

RADAR required for procedure entry. DME or RADAR required.



VDP NA with Aurora altimeter setting. When local altimeter setting not received, use Aurora altimeter setting and increase DA to 1174 feet and all MDA 80 feet; CETAN fix minimums increase Circling Cat C and D visibility 1/4 SM. For inop ALS, increase S-ILS 2 all Cats visibility to 3/8 SM. CETAN fix minimums: For inop ALS, increase S-LOC 2 Cat C and D visibility to 1 SM.

MALSRS  MISSED APPROACH:
Climb to 3000 on heading 022° and OBK VOR/DME R-254 to YEARN I and hold.

AWOS-3
119.075


CHICAGO APP CON
133.5 349.0

UNICOM
122.7(CTAF) 

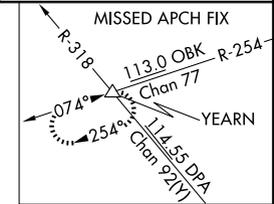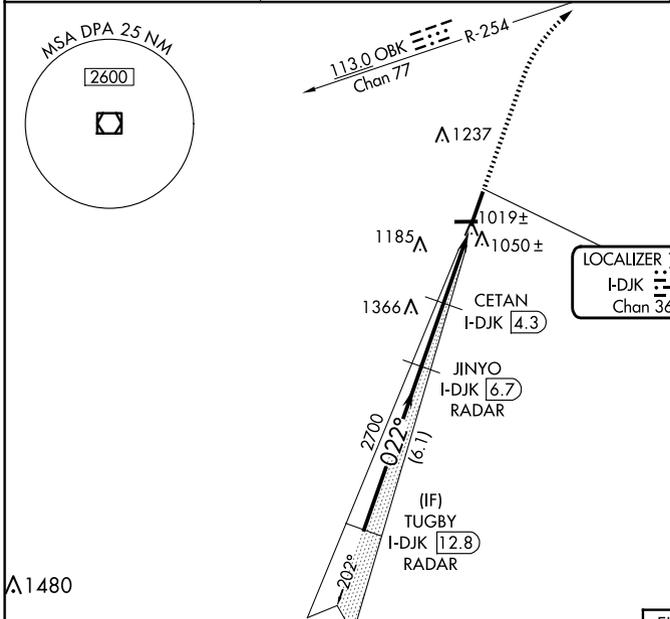


LOCALIZER 109.95
I-DJK Chan 36(Y)

DUPAGE
114.55 DPA Chan 92(Y)

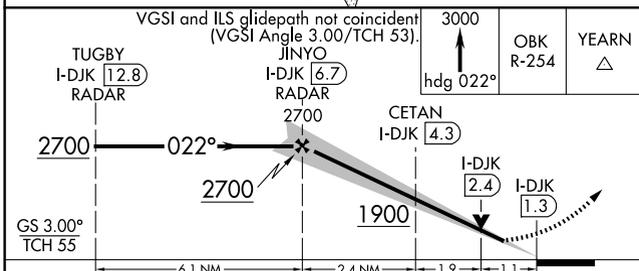

ELEV 913	TDZE 913
MIRL Rwys 2-20	
MIRL Rwys 9-27	
REIL Rwys 9, 20 and 27	

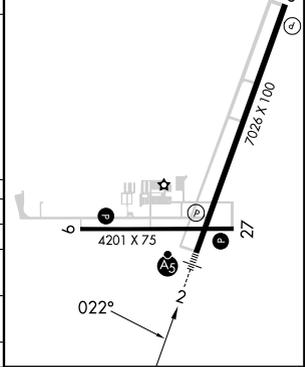

CATEGORY	A	B	C	D
S-ILS 2	1113-1/2		200 (200-1/2)	
S-LOC 2	1900-3/4 987 (1000-3/4)	1900-1 987 (1000-1)	1900-2 1/2	987 (1000-2 1/2)
CIRCLING	1900-1 1/4 987 (1000-1 1/4)	1900-1 1/2 987 (1000-1 1/2)	1900-3	987 (1000-3)
CETAN FIX MINIMUMS (DME REQUIRED)				
S-LOC 2	1280-1/2	367 (400-1/2)	1280-5/8	367 (400-5/8)
CIRCLING	1360-1 447 (500-1)	1500-1 587 (600-1)	1600-2 687 (700-2)	1740-2 3/4 827 (900-2 3/4)

FAF to MAP 5.4 NM					
Knots	60	90	120	150	180
Min:Seq	5:24	3:36	2:42	2:10	1:48

EC-3, 19 FEB 2026 to 19 MAR 2026

EC-3, 19 FEB 2026 to 19 MAR 2026