

WAAS CH <b>53708</b> <b>W13A</b>	APP CRS <b>130°</b>	Rwy Ldg <b>8001</b> TDZE <b>18</b> Apt Elev <b>19</b>
----------------------------------------	------------------------	-------------------------------------------------------------

# RNAV (GPS) RWY 13

CAMERON COUNTY (PIL)




RNP APCH.

Baro-VNAV NA when using Brownsville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. VDP NA when using Brownsville altimeter setting.

When local altimeter setting not received, use Brownsville altimeter setting and increase all DA 38 feet and all MDA 40 feet, increase LPV all Cats, LNAV Cat C, and Circling Cat C visibility ¼ mile. Circling Rws 3, 8, 17, 21, 26, 35 NA at night.

MISSED APPROACH: Climb to 3000 direct COKAX and via 185° track to CHICO and hold.

ASOS <b>118.525</b>	VALLEY APP CON <b>119.5 257.6</b>	CLNC DEL <b>119.2</b>	UNICOM <b>122.8</b> (CTAF)
------------------------	--------------------------------------	--------------------------	-------------------------------

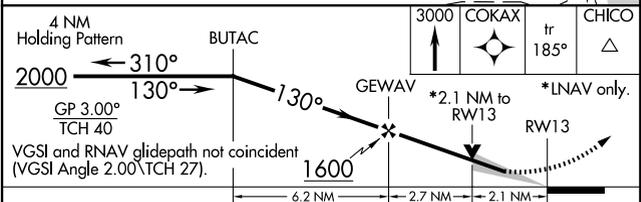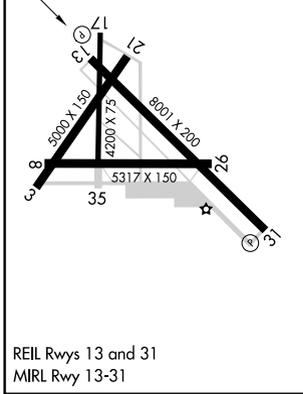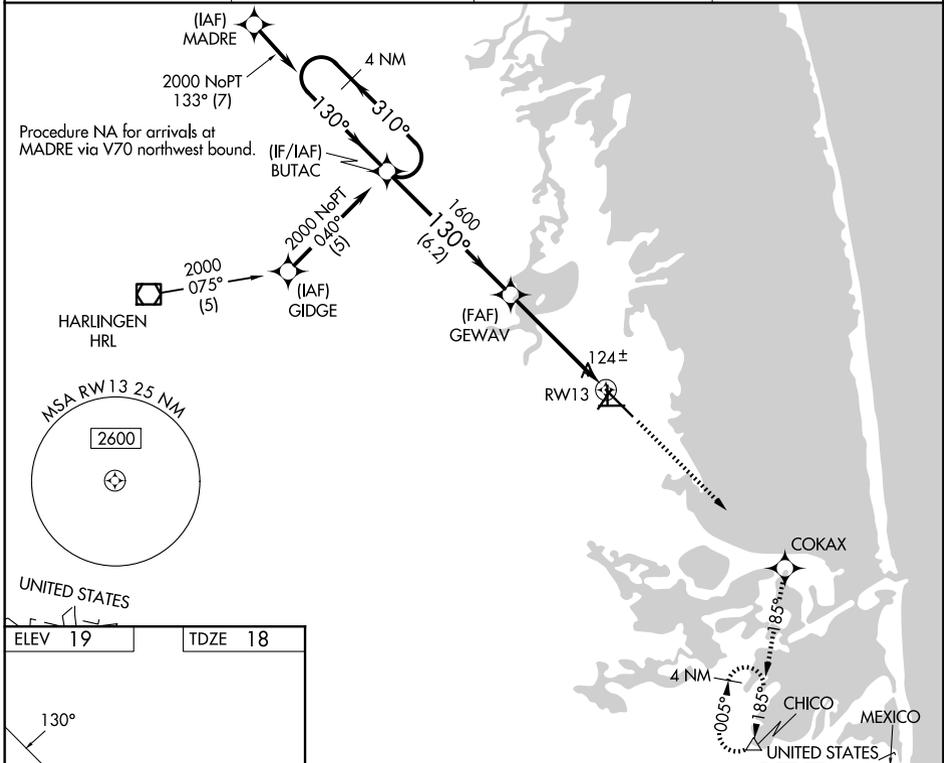

CATEGORY	A	B	C	D
LPV DA		376-1¼	358 (400-1¼)	NA
LNAV/VNAV DA		424-1½	406 (500-1½)	NA
LNAV MDA	480-1	462 (500-1)	480-1¼ 462 (500-1¼)	NA
CIRCLING	540-1 521 (600-1)	620-1 601 (700-1)	840-2½ 821 (900-2½)	NA

SC-3, 19 FEB 2026 to 19 MAR 2026

SC-3, 19 FEB 2026 to 19 MAR 2026