

VORTAC STL <b>117.4</b> Chan <b>121</b>	APP CRS <b>208°</b>	Rwy Ldg <b>3800</b> TDZE <b>437</b> Apt Elev <b>437</b>
---	------------------------	---


# VOR RWY 18

ST CHARLES COUNTY RGNL/SMARTT FLD (SE/T)

⚠ When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all MDAs 60 feet and Circling visibility Cat C ¼ SM. NUPDE fix minimums: increase Circling visibility Cat C ¼ SM. Straight-in minimums NA with St Louis Lambert Intl altimeter setting.

MISSED APPROACH: Climb to 1000 then climbing left turn to 2700 via heading 360° and STL R-031 to FASHE INT/19.4 DME and hold.

ASOS <b>118.075</b>	ST. LOUIS APP CON <b>124.2 353.9</b>	CLNC DEL <b>121.6</b>	UNICOM <b>122.7 (CTAF) 0</b>
------------------------	---	--------------------------	---------------------------------

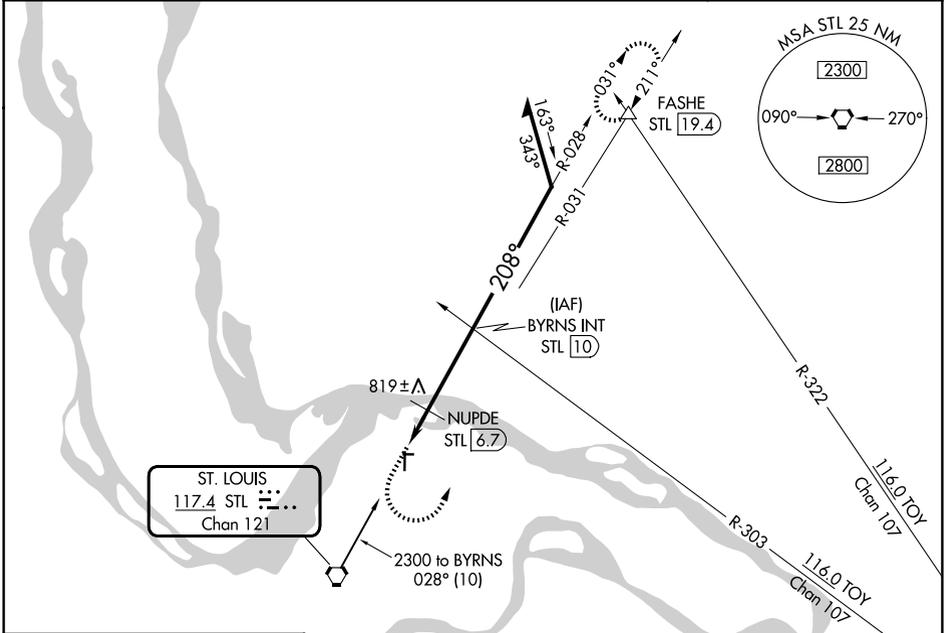

NC-3, 19 FEB 2026 to 19 MAR 2026

NC-3, 19 FEB 2026 to 19 MAR 2026

ELEV <b>437</b>	TDZE <b>437</b>
MRL Rwys 9-27 and 18-36 FAF to MAP 5 NM	
Knots	60 90 120 150 180
Min:Sec	5:00 3:20 2:30 2:00 1:40

1000	2700	STL R-031	FASHE △	
VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 40).				
NUPDE STL 6.7 STL 6 3.77% TCH 43		BYRNS INT STL 10 Remain within 10 NM		
STL 5 1160*		2300 *1220 when using St Louis Lambert Intl altimeter setting.		
CATEGORY	A	B	C	D
S-18	1160-1	723 (800-1)	1160-2 723 (800-2)	NA
CIRCLING	1160-1	723 (800-1)	1220-2¼ 783 (800-2¼)	NA
NUPDE FIX MINIMUMS				
S-18	800-1 363 (400-1)		NA	
CIRCLING	840-1 403 (500-1)	900-1 463 (500-1)	1220-2¼ 783 (800-2¼)	NA