


WAAS CH 69329 W23A	APP CRS 227°	Rwy Idg TDZE 716 Apt Elev 725	5405
--	------------------------	---	-------------

RNAV (GPS) RWY 23

ROSS COUNTY (R/ZT')

RNP APCH - GPS.			MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct JONEX and hold.
⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. ⚠ When local altimeter setting not received, use Rickenbacker Intl altimeter setting and increase all DA/MDA 60 feet, increase LPV all Cats, LNAV/VNAV all Cats and LNAV Cat C and D and Circling Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Rickenbacker Intl altimeter setting. Rwy 23 helicopter visibility reduction below ¾ SM NA.			
AWOS-3 119.225	COLUMBUS APP CON 134.0 279.6	UNICOM 122.8 (CTAF)	123.0 0

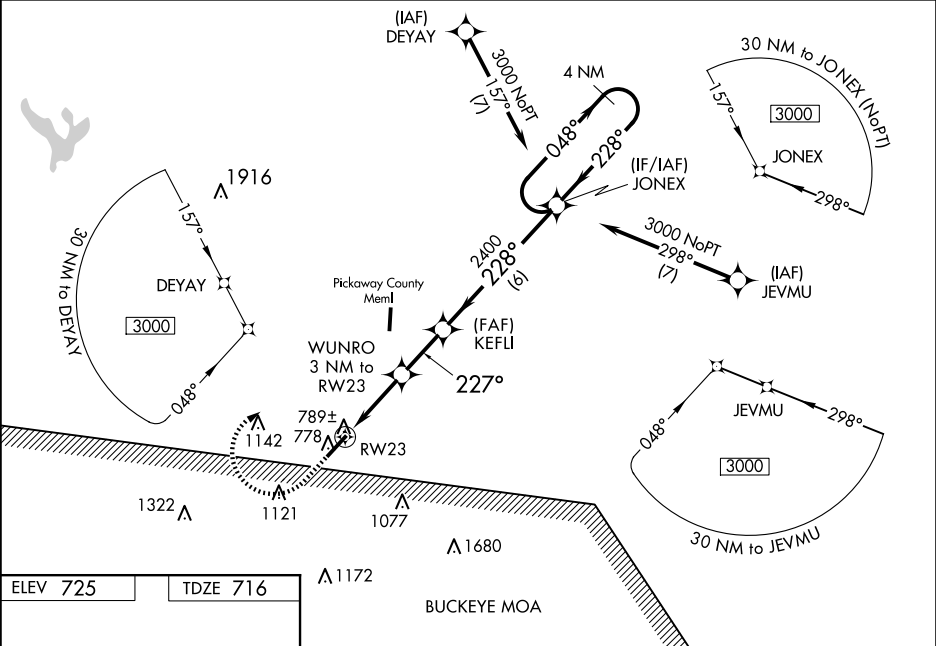

ELEV 725

TDZE 716

227°

5405 x 100

0.6% UP

REIL Rws 5 and 23 ⓪
MIRL Rwy 5-23 ⓪

1500

3000

JONEX

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 45).

4 NM Holding Pattern

*LNAV only.

*0.9 NM to RW23

WUNRO 3 NM to RW23

RW23

KEFLI 2400

JONEX

048°

228°

227°

2400

3000

GP 3.00° TCH 45

0.9

2.1 NM

2.2

6 NM

CATEGORY	A	B	C	D
LPV DA		966-¾	250 (300-¾)	
LNAV/VNAV DA		1088-1¼	372 (400-1¼)	
LNAV MDA		1040-1	324 (400-1)	
CIRCLING	1320-1 595 (600-1)	1380-1 655 (700-1)	1500-2¼ 775 (800-2¼)	1540-2¾ 815 (900-2¾)