

| | | |
|--|------------------------|---|
| WAAS CH 45905 W22A | APP CRS 215° | Rwy Ldg 7193 TDZE 26 Apt Elev 26 |
|--|------------------------|---|

RNAV (GPS) RWY 22


PUNTA GORDA (PGD)

RNP APCH.



⚠ Baro-VNAV NA when using Page Fld altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C or above 54°C. When local altimeter setting not received, use Page Fld altimeter setting and increase LPV DA to 276, LNAV/VNAV DA to 360, and all MDAs 60 feet; increase LNAV Cats C and D visibility ¼ SM, and Circling Cats C and D visibility ¼ SM.

MISSED APPROACH: Climb to 2000 direct BULOW and hold.

| | | | | |
|------------------------|--|---|--------------------------|--------------------------|
| ATIS 135,675 | FORT MYERS APP CON★ 127.05 306.2 | PUNTA GORDA TOWER★ 121.0 (CTAF) 0 | GND CON 119.55 | UNICOM 122,975 |
|------------------------|--|---|--------------------------|--------------------------|

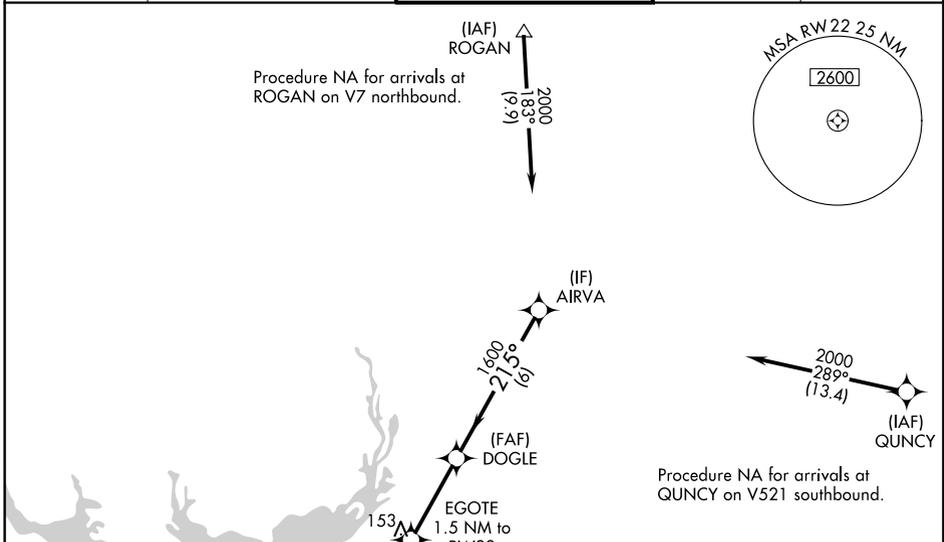

| | | |
|---------|----------|---------|
| ELEV 26 | D | TDZE 26 |
|---------|----------|---------|

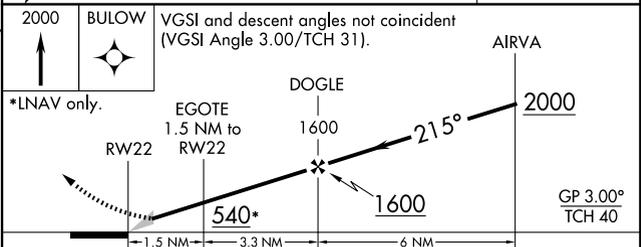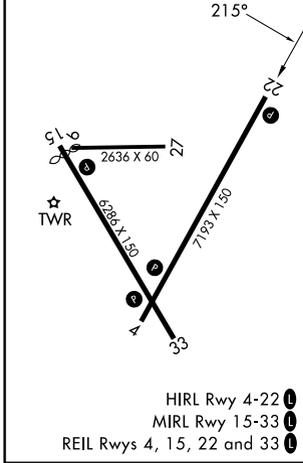

| CATEGORY | A | B | C | D |
|--------------|----------------------|----------------------|------------------------------|------------------------------|
| LPV DA | | 226-3/4 | 200 (200-3/4) | |
| LNAV/VNAV DA | | 310-1 | 284 (300-1) | |
| LNAV MDA | 420-1 | 394 (400-1) | 420-1 1/8 | 394 (400-1 1/8) |
| CIRCLING | 460-1 434 (500-1) | 580-1 554 (600-1) | 600-1 1/2 574 (600-1 1/2) | 740-2 1/4 714 (800-2 1/4) |