

WAAS CH <b>78125</b> <b>W27A</b>	APP CRS <b>268°</b>	Rwy Ldg TDZE Apt Elev	<b>4799</b> <b>2728</b> <b>2729</b>
--	------------------------	-----------------------------	---


# RNAV (GPS) RWY 27

TILLITT FLD (1S3)

**NA** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 53°C (128°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use Miles City altimeter setting: increase LPV and LNAV/VNAV DA to 3066 and all visibilities 1/8 mile. Increase all MDA 100 feet and all Cat C and D visibilities 1/4 mile. VDP and Baro-VNAV NA when using Miles City altimeter setting.

**MISSED APPROACH:** Climb to 6000 direct FREYA and on track 218° to CONUK and hold.

AWOS-3PT <b>121.125</b>	SALT LAKE CENTER <b>126.85 305.2</b>	UNICOM <b>122.8 (CTAF)</b>
----------------------------	---	-------------------------------

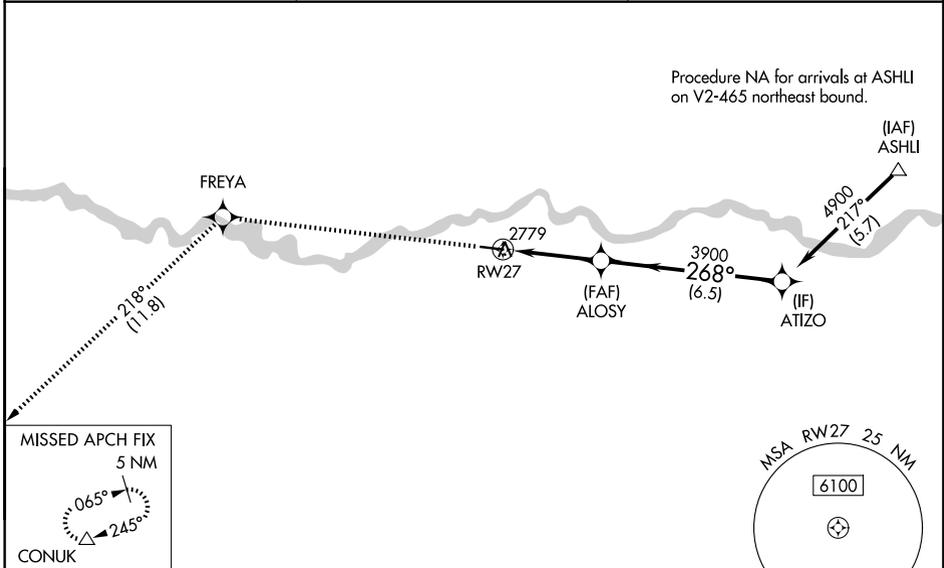

ELEV 2729	TDZE 2728
-----------	-----------

6000	FREYA	tr 218°	CONUK	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 29).	ATIZO
↑	✧		△		
*LNAV only		*0.9 NM to RW27		ALOSY	
RW27		3900		3900	4900
0.9 NM		2.6 NM		6.5 NM	
GP 3.00°		TCH 51			
CATEGORY	A		B	C	D
LPV DA			2978-1	250 (300-1)	
LNAV/VNAV DA			2978-1	250 (300-1)	
LNAV MDA			3040-1	312 (400-1)	
CIRCLING	3160-1 431 (500-1)	3320-1 591 (600-1)	3340-1 3/4 611 (700-1 3/4)	3700-3 971 (1000-3)	

NW-1, 19 FEB 2026 to 19 MAR 2026

NW-1, 19 FEB 2026 to 19 MAR 2026