

MILFORD, IOWA

AL-6455 (FAA)


23278

VOR/DME SPW 115.15 Chan 98 (Y)	APP CRS 005°	Rwy Idg TDZE Apt Elev 1439	N/A N/A
--	------------------------	---	--------------------------

VOR-A
FULLER(4D8)

DME required. RADAR required for procedure entry.	MISSED APPROACH: Climbing right turn to 3000 direct SPW VOR/DME and hold.
 NA Circling NA to Rwys 18 and 36. Procedure NA at night. Use Spencer altimeter setting, when not received, use Estherville altimeter setting and increase all MDA 40 feet.	

SPW ASOS 126.625	MINNEAPOLIS CENTER 127.75 257.7	CTAF 122.9
----------------------------	---	----------------------

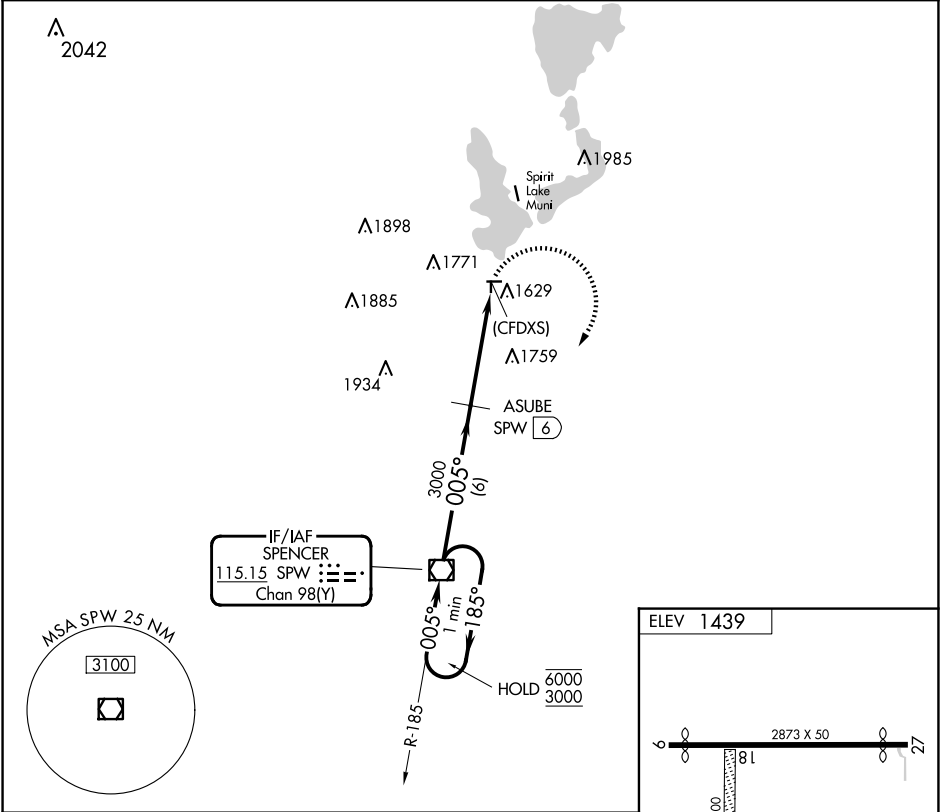

One Minute Holding Pattern		SPW VOR/DME	ASUBE SPW 6	3000	SPW
6000 3000		185° 005°	005°	3000	
6 NM		4.4 NM		URL Rwy 9-27 and 18-36	
CATEGORY	A	B	C	D	FAF to MAP 4.4 NM
 CIRCLING	2100-1 661 (700-1)		NA		Knots 60 90 120 150 180 Min:Sec 4:24 2:56 2:12 1:46 1:28

MILFORD, IOWA
Amdt 1 03JAN19

43°20'N-95°10'W

FULLER(4D8)
VOR-A

NC-3, 19 FEB 2026 to 19 MAR 2026

NC-3, 19 FEB 2026 to 19 MAR 2026