

WAAS CH 72628 W36A	APP CRS 358°	Rwy Idg TDZE 256 Apt Elev 256	3204 256 256
----------------------------------------	------------------------	---------------------------------------------------	-----------------------------------------

RNAV (GPS) RWY 36

JONESBORO (F88)





RNP APCH - GPS

▼ VDP NA when using Ruston altimeter setting. Obtain local altimeter setting on CTAF; when not received, use Ruston altimeter setting and increase all MDAs 60 feet, and LP, LNAV and Circling visibility Cat C ¼ SM.



MISSED APPROACH: Climb to 2400 direct FIMUG and hold.

MONROE APP CON ★
126.9 307.9

CTAF
122.9 0

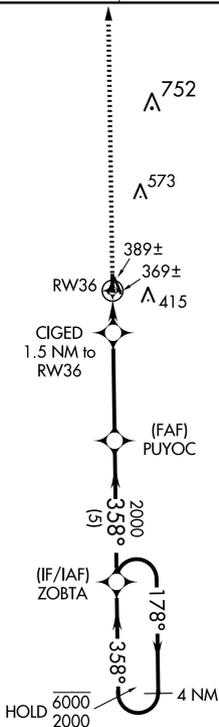

ELEV 256	TDZE 256
----------	----------

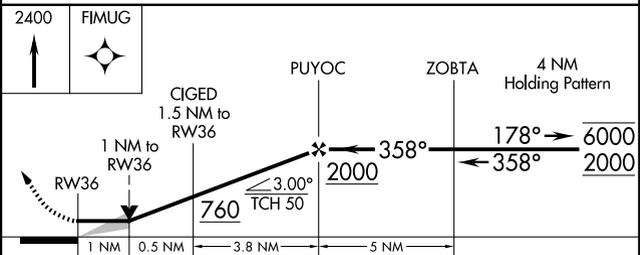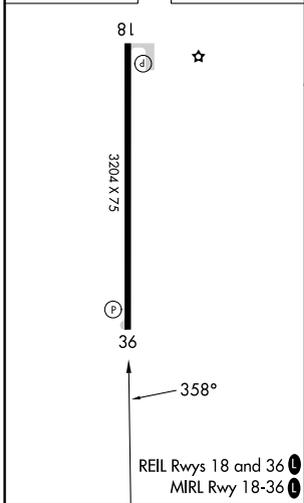

CATEGORY	A	B	C	D
LP MDA	620-1 364 (400-1)			NA
LNAV MDA	640-1	384 (400-1)	640-1½ 384 (400-1½)	NA
CIRCLING	780-1	524 (600-1)	880-1¾ 624 (700-1¾)	NA