


WAAS CH 45722 W11A	APP CRS 110°	Rwy Ldg 4876 TDZE 854 Apt Elev 871
--	------------------------	---

RNAV (GPS) RWY 11

LEBANON SPRINGFIELD/GEORGE HOERTER FLD (6I2)

RNP APCH.	<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. ▲ When local altimeter setting not received, use Danville altimeter setting and increase all DA 74 feet and all MDA 80 feet. Increase LPV, LNAV/VNAV, and Circling Cat D visibility ¼ mile and LNAV Cats C/D ⅓ mile. Baro-VNAV NA when using Danville altimeter setting.</p>	MISSED APPROACH: Climb to 4000 direct WOBIL and hold, continue climb-in-hold to 4000.
-----------	---	---

AWOS-3P 119.725	LOUISVILLE APP CON 132.075 327.0	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

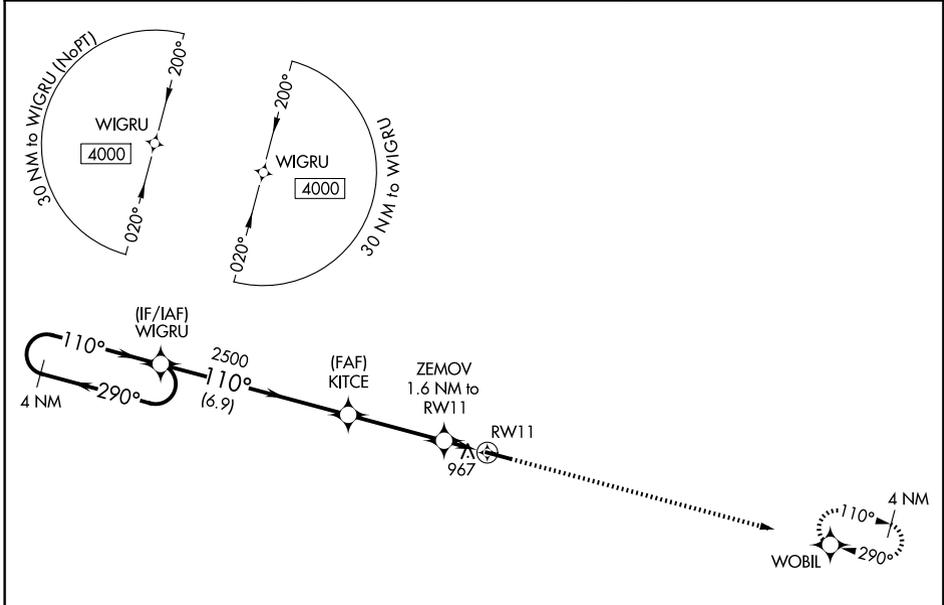

SE-1, 19 FEB 2026 to 19 MAR 2026

SE-1, 19 FEB 2026 to 19 MAR 2026

	ELEV 871	TDZE 854		
4 NM Holding Pattern	WIGRU	4000 WOBIL		
	6.9 NM	3.6 NM 1.6 NM		
CATEGORY	A	B	C	D
LPV DA		1104-1	250 (300-1)	
LNAV/VNAV DA		1159-1⅓	305 (300-1⅓)	
LNAV MDA		1220-1	366 (400-1)	
CIRCLING	1320-1 449 (500-1)	1340-1 469 (500-1)	1360-1½ 489 (500-1½)	1500-2 629 (700-2)
	MIRL Rwy 11-29 0 REIL Rwys 11 and 29 0			

RNAV (GPS) RWY 11