




APP CRS 354°	Rwy Idg 4000
	TDZE 984
	Apt Elev 985

RNAV (GPS) RWY 35

CHANDLER RGNL (CQB)

RNP APCH.	MISSED APPROACH: Climb to 2600 direct CADUT and hold.
<p>▽ When local altimeter setting not received, use Shawnee altimeter setting and increase all MDA 80 feet; increase LNAV Cat C visibility 1/8 SM. VDP NA with Shawnee Rgnl altimeter setting.</p> <p>▲ NA</p>	

AWOS-3PT 119.275	KANSAS CITY CENTER 127.8 319.1	CTAF 122.9
----------------------------	--	----------------------

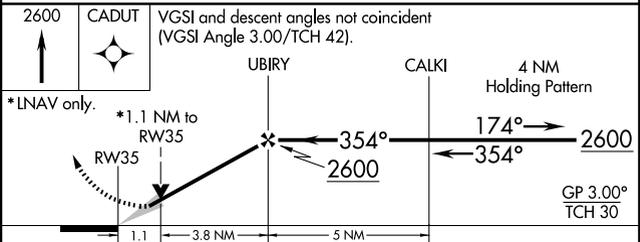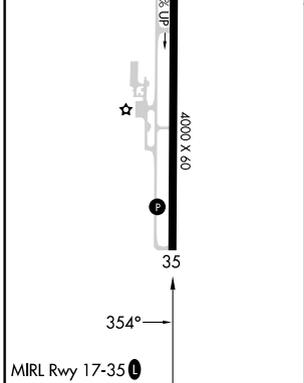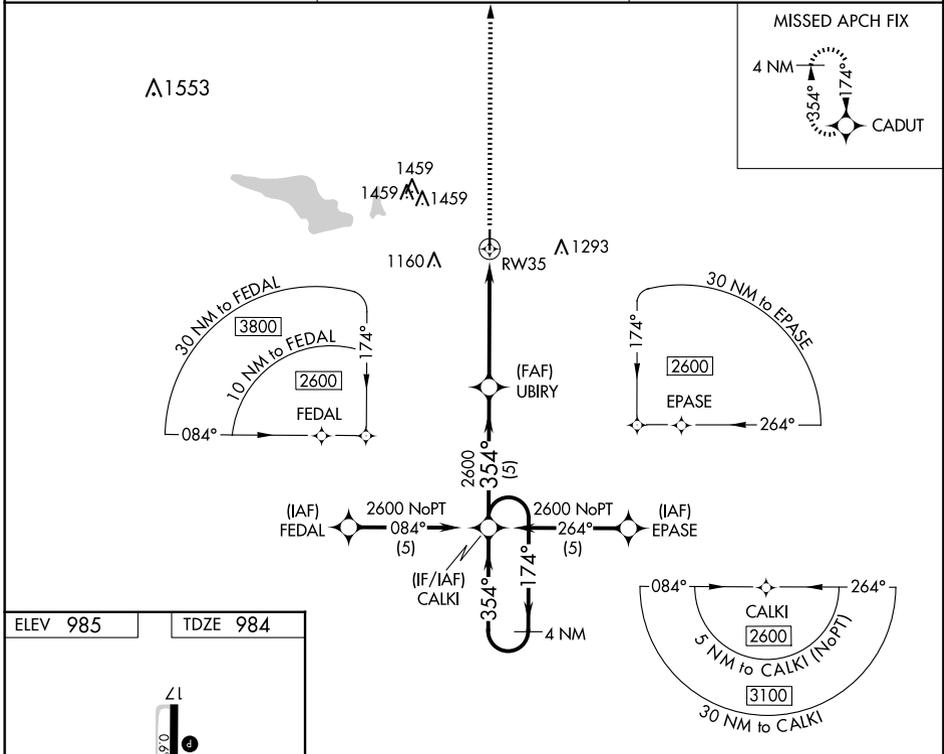

2600	CADUT	VGSi and descent angles not coincident (VGSi Angle 3.00/TCH 42).			
*LNAV only.					
*1.1 NM to RW35					
RW35					
UBIRY					
CALKI					
4 NM Holding Pattern					
2600					
GP 3.00° TCH 30					
CATEGORY	A	B	C	D	
GLS PA DA	NA				
LNAV/VNAV DA	NA				
LNAV MDA	1320-1	335 (400-1)	NA		

SC-1, 19 FEB 2026 to 19 MAR 2026

SC-1, 19 FEB 2026 to 19 MAR 2026