WAAS CH 69418 W25A	APP CRS 247°	Rwy ldg 3434 TDZE 8 Apt Elev 9

RNAV (GPS) RWY 25
BEAUFORT EXEC (ARW)

ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Beaufort MCAS (Merritt Fld) altimeter setting and increase LPV DA to 226, LNAV/VNAV DA to 352, and all MDA 20 feet. VDP and Baro-VNAV NA when using Beaufort MCAS (Merritt Fld) altimeter setting.

MISSED APPROACH: Climb to 2000 direct EROMY and hold.

AWOS-3	BEAUFORT APP CON★	UNICOM
119.675	125.125 292.125	122.7 (CTAF) L

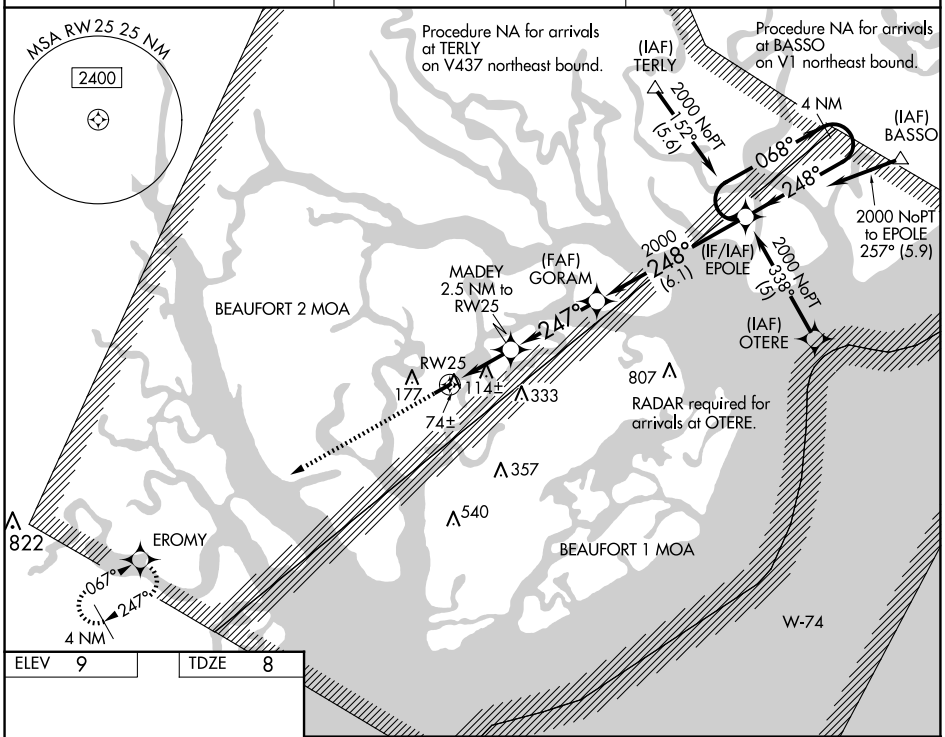

ELEV 9 TDZE 8



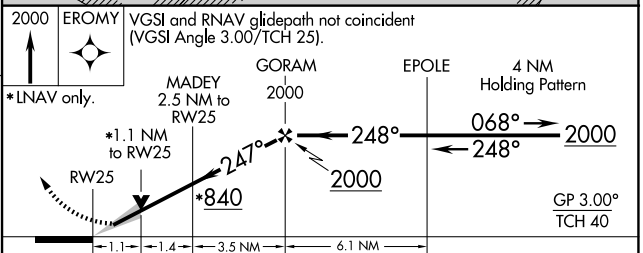

CATEGORY	A	B	C	D
LPV DA	208-1 200 (200-1)			NA
LNAV/VNAV DA	334-1¼ 326 (400-1¼)			NA
LNAV MDA	380-1 372 (400-1)			NA
CIRCLING	480-1 471 (500-1)		640-1¾ 631 (700-1¾)	NA

REIL Rwy 25
MIRL Rwy 7-25 L

SE-2, 19 FEB 2026 to 19 MAR 2026