

WAAS CH <b>61140</b> <b>W35A</b>	APP CRS <b>354°</b>	Rwy Idg TDZE <b>1003</b> Apt Elev <b>1003</b>
--	------------------------	---


# RNAV (GPS) RWY 35

PERRY MUNI (F22)



**NA** For uncompensated Baro-VNAV systems, procedure NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Ponca City altimeter setting. Rwy 35 helicopter visibility reduction below 3/4 SM NA. Obtain local altimeter setting on CTAF; when not received, use Ponca City altimeter setting and increase all DA 53 feet and all visibility 1/8 SM, increase all MDAs 60 feet and Cat C visibility 1/4 SM.

**MISSED APPROACH:**  
Climb to 3000 direct AHOBY and hold.

KANSAS CITY CENTER **127.8 319.1** UNICOM **122.8 (CTAF)**

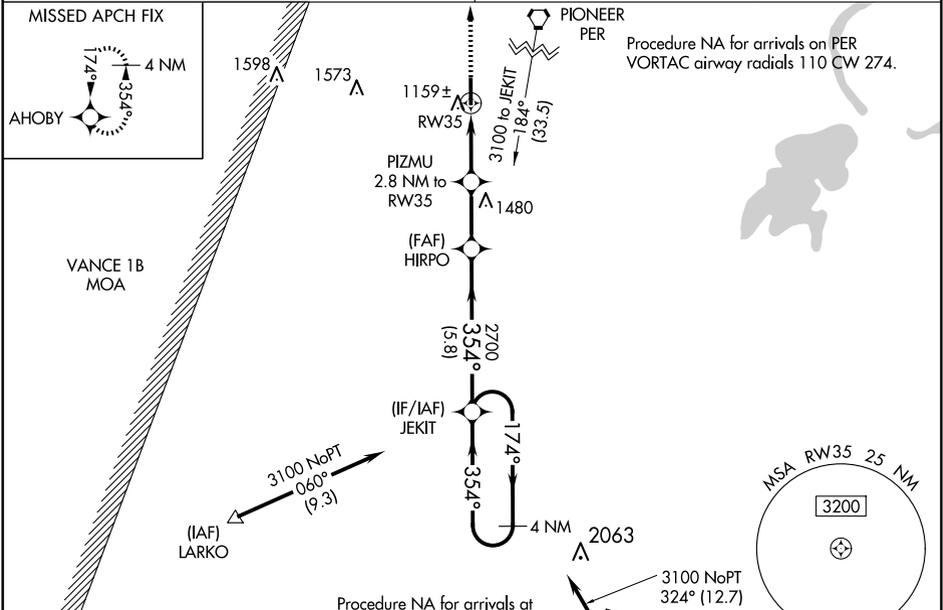

ELEV 1003	TDZE 1003
-----------	-----------

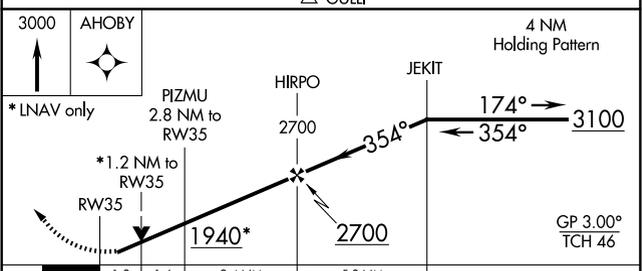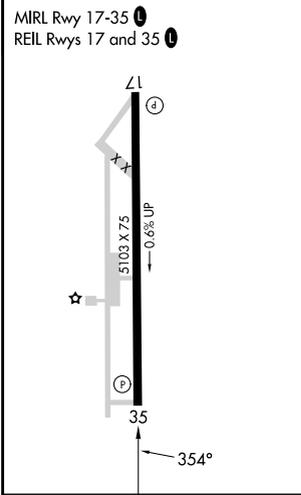

CATEGORY	A	B	C	D
LPV DA	1253-3/4	250 (300-3/4)		NA
LNAV/VNAV DA	1330-1 1/8	327 (400-1 1/8)		NA
LNAV MDA	1420-1	417 (500-1)	1420-1 1/8 417 (500-1 1/8)	NA
<b>CIRCLING</b>	1480-1	477 (500-1)	1620-1 3/4 617 (700-1 3/4)	NA

SC-1, 19 FEB 2026 to 19 MAR 2026

SC-1, 19 FEB 2026 to 19 MAR 2026