

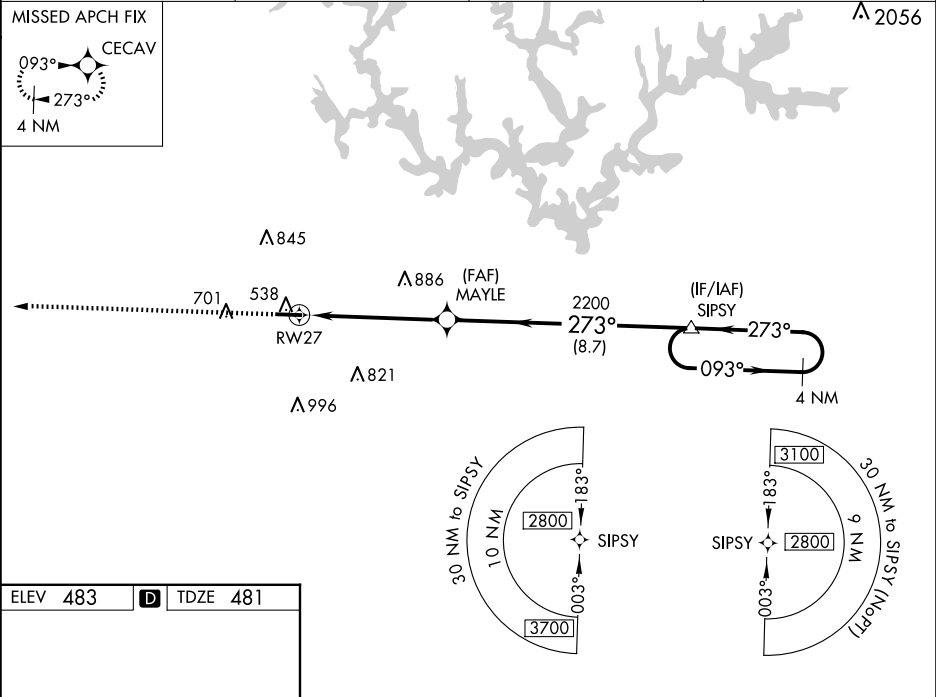
|                                        |                        |                                                               |                                                             |
|----------------------------------------|------------------------|---------------------------------------------------------------|-------------------------------------------------------------|
| WAAS<br>Ch <b>49025</b><br><b>W27A</b> | APP CRS<br><b>273°</b> | Rwy Idg <b>4800</b><br>TDZE <b>481</b><br>Apt Elev <b>483</b> | <b>RNAV (GPS) RWY 27</b><br>WALKER COUNTY/BEVILL FLD (JF'X) |
|----------------------------------------|------------------------|---------------------------------------------------------------|-------------------------------------------------------------|



Baro-VNAV NA when using Birmingham altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 40°C (104°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. VDP NA with Birmingham altimeter setting. When local altimeter setting not received, use Birmingham altimeter setting and increase all DA 104 feet and all MDA 120 feet. Increase LPV all Cats, LNAV/VNAV all Cats, LNAV Cat C/D and Circling Cat C visibility ¾ mile and Circling Cat D visibility ½ mile.


MISSED APPROACH:  
Climb to 2800 direct  
CECAV and hold.


|                            |                                            |                       |                                   |
|----------------------------|--------------------------------------------|-----------------------|-----------------------------------|
| AWOS-3PT<br><b>119.225</b> | BIRMINGHAM APP CON<br><b>127.675 338.2</b> | GCO<br><b>121.725</b> | UNICOM<br><b>123.075 (CTAF) 0</b> |
|----------------------------|--------------------------------------------|-----------------------|-----------------------------------|




2800 CECAV  


\* LNAV only  


MAYLE  
2200  


SIPSY  
2200  


4 NM Holding Pattern  


GP 3.00°  
TCH 44

|                  |                       |                       |                       |                           |
|------------------|-----------------------|-----------------------|-----------------------|---------------------------|
| CATEGORY         | A                     | B                     | C                     | D                         |
| LPV DA           | 789-1                 | 308 (300-1)           |                       |                           |
| LNAV/ DA<br>VNAV | 964-1 ½               | 483 (500-1%)          |                       |                           |
| LNAV MDA         | 1040-1                | 559 (600-1)           | 1040-1 ½              | 559 (600-1%)              |
| CIRCLING         | 1040-1<br>557 (600-1) | 1080-1<br>597 (600-1) | 1160-2<br>677 (700-2) | 1360-2 ¾<br>877 (900-2 ¾) |