

VORTAC FAM 115.7 Chan 104	APP CRS 212°	Rwy Ldg 4000 TDZE 880 Apt Elev 880
---	------------------------	---

VOR RWY 19

A PAUL VANCE FREDERICKTOWN RGNL (H88)

 Use Farmington Rgnl altimeter setting. Rwy 19 helicopter visibility reduction below $\frac{3}{4}$ SM NA.	MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct FAM VORTAC and hold.
KANSAS CITY CENTER 127.475 346.275	UNICOM 122.8 (CTAF) 

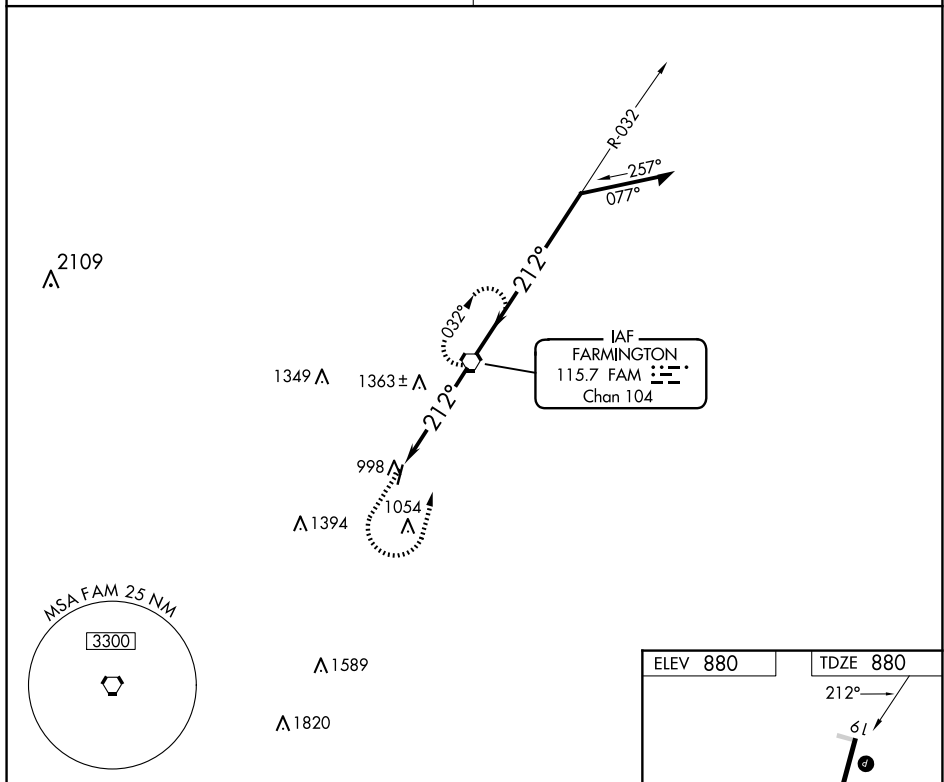


Figure 1 illustrates a VORTAC station (FAM VORTAC) with various bearings and distances. The diagram includes a legend for the symbols used: 2000 (arrow), 3000 (curved arrow), and FAM (pentagon). The bearings shown are 032°, 212°, and 2.91°. The distances shown are 2900, 2300, and 4.5 NM. The diagram also includes a legend for the symbols used: 2000 (arrow), 3000 (curved arrow), and FAM (pentagon).

