


LOC/DME I-IPJ 111.15 Chan 48(Y)	APP CRS 233°	Rwy Ldg TDZE Apt Elev	5501 872 878
--	------------------------	-----------------------------	---

ILS Z or LOC Z RWY 23

LINCOLN COUNTY RGNL (IPJ)

RADAR or RNAV required for procedure entry. VDP NA when using CLT altimeter setting. Rwy 23 helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use CLT altimeter setting: increase S-ILS 23 DA to 1213 feet and all visibilities 1/8 SM; increase all MDAs 80 feet and S-LOC 23 visibility Cats C/D 1/8 SM and Circling visibility Cats C/D 1/4 SM; increase GATEQ Fix Minimums S-LOC visibility Cats C/D and Circling visibility Cats C/D 1/4 SM.			MISSED APPROACH: Climb to 1600 then climbing right turn to 3100 on heading 043° and BZM VOR/DME R-143 to JIVOM INT/I-IPJ 13.4 DME/RADAR and hold.
AWOS-3 119.675	CHARLOTTE APP CON 134.75 257.2	CLNC DEL (GCO) 124.9	UNICOM 123.05 (CTAF) 0

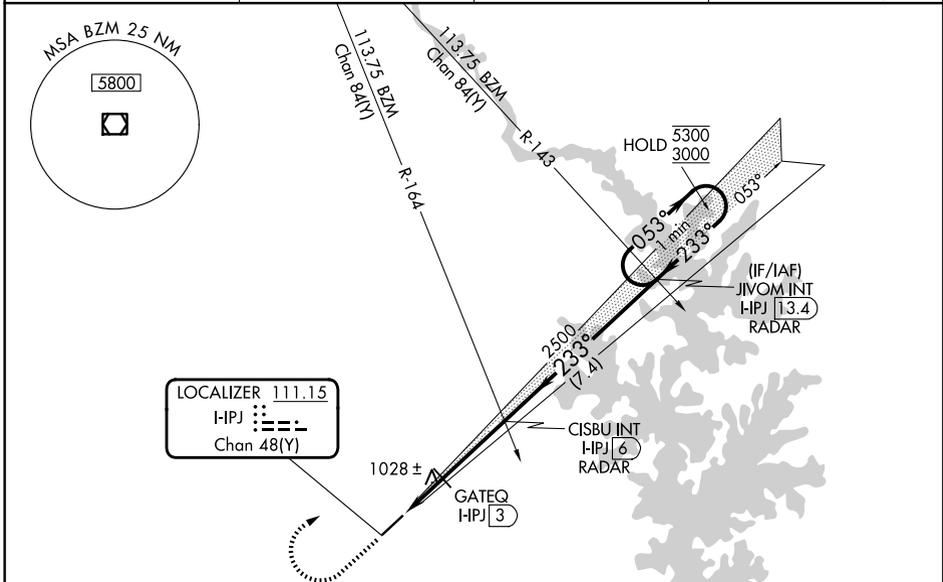

ELEV 878	TDZE 872	1600 3100 hdg 043° BZM R-143 JIVOM INT One Minute Holding Pattern			
		JIVOM INT HPJ 13.4 RADAR CISBU INT HPJ 6 RADAR GATEQ HPJ 3 5300 3000 GS 3.00° TCH 47			
		1.2 NM 0.9 NM 3 NM 7.4 NM			
CATEGORY	A	B	C	D	
S-ILS 23	1149-7/8 277 (300-7/8)				
S-LOC 23	1460-1	588 (600-1)	1460-1 3/4	588 (600-1 3/4)	
CIRCLING	1460-1	582 (600-1)	1660-2 1/4 782 (800-2 1/4)	1660-2 1/2 782 (800-2 1/2)	
GATEQ FIX MINIMUMS					
S-LOC 23	1280-1	408 (500-1)	1280-1 1/8	408 (500-1 1/8)	
CIRCLING	1400-1 522 (600-1)	1440-1 562 (600-1)	1660-2 1/4 782 (800-2 1/4)	1660-2 1/2 782 (800-2 1/2)	

SE-2, 19 FEB 2026 to 19 MAR 2026

SE-2, 19 FEB 2026 to 19 MAR 2026