

WAAS CH 86512 W06A	APP CRS 060°	Rwy Idg TDZE 604 Apt Elev 609
--	------------------------	---

RNAV (GPS) RWY 6

RALEIGH RGNL AT PERSON COUNTY (TDF')


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cat C/D visibility to 1 SM.

MALSR

MISSED APPROACH:
Climb to 3000 direct TACUV and hold.

AWOS-3 126.725	RALEIGH APP CON 132.35 256.9	GCO 119.7	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------	---------------------------------

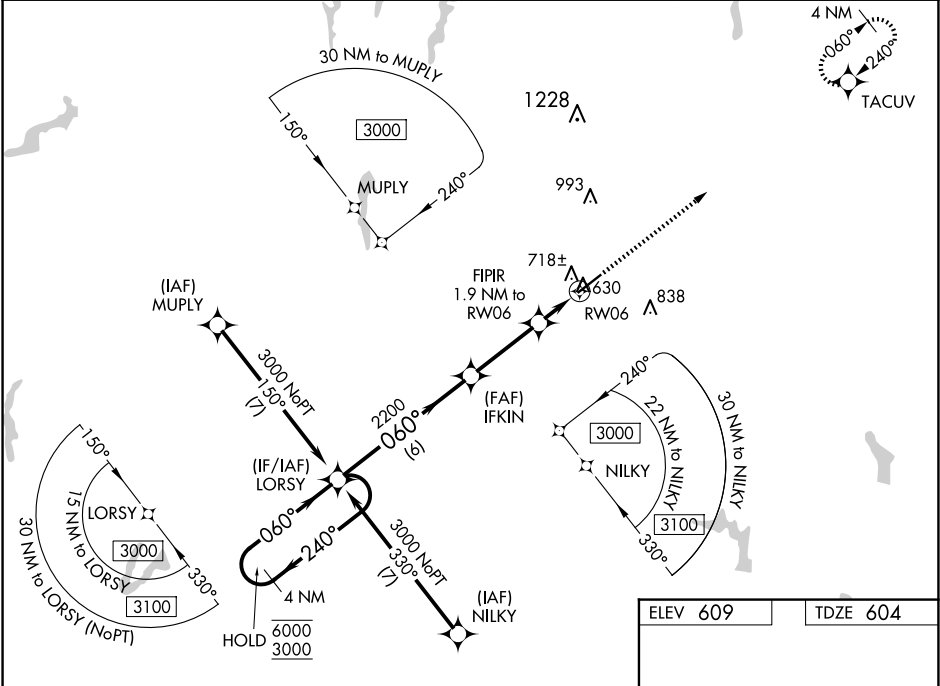

4 NM Holding Pattern		LORSY	IFKIN	FIPR	TACUV
6000 ← 240°		2200	2200	1.9 NM to RW06	3000
3000 → 060°		1220	1.1 NM to RW06	0.8	
GP 3.00°		6 NM	3.1 NM	1.1 NM	
TCH 40					
CATEGORY	A	B	C	D	
LPV DA		804-½	200 (200-½)		
LNAV/VNAV DA		879-½	275 (300-½)		
LNAV MDA	980-½	376 (400-½)	980-⅝	376 (400-⅝)	
CIRCLING	1080-1	471 (500-1)	1300-2 691 (700-2)	1300-2¼ 691 (700-2¼)	

