

WAAS CH 90535 W17A	APP CRS 174°	Rwy Ldg 4000 TDZE 600 Apt Elev 600
--	------------------------	---

RNAV (GPS) RWY 17



TAYLOR MUNI (T74)

RNP APCH.


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16C or above 54C. When local altimeter setting not received, use Austin Exec altimeter setting and increase all DA to 914 feet and all MDA 40 feet. VDP and Baro-VNAV NA when using Austin Exec altimeter setting.

MISSED APPROACH: Climb to 1100 then climbing right turn to 3100 direct CWK VORTAC and hold.


AWOS-3PT 119.75	AUSTIN APP CON 127.225 317.65	UNICOM 122.8 (CTAF) 0
---------------------------	---	---------------------------------

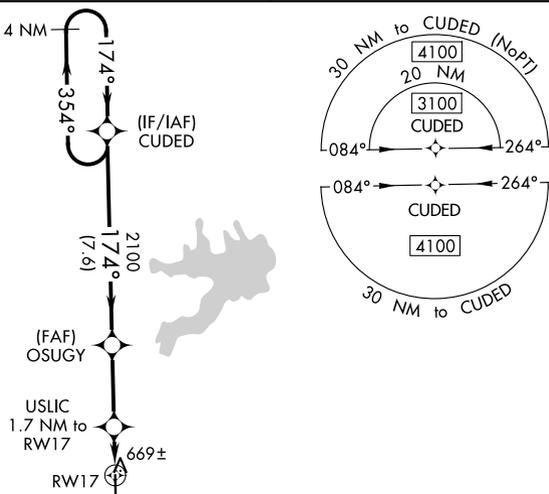

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).

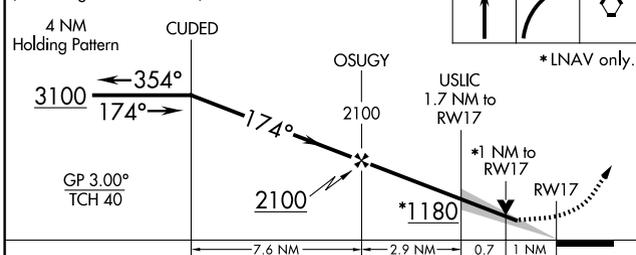

CATEGORY		A	B	C	D
LPV DA		882-7/8	282 (300-7/8)		NA
LNAV/VNAV DA		882-7/8	282 (300-7/8)		NA
LNAV MDA		960-1	360 (400-1)		NA
CIRCLING		1100-1	500 (500-1)		NA

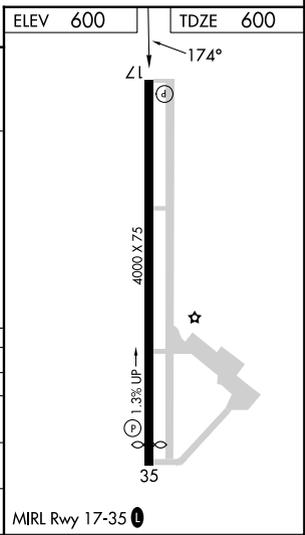

SC-3, 19 FEB 2026 to 19 MAR 2026

SC-3, 19 FEB 2026 to 19 MAR 2026