APP CRS	Rwy Ldg	12000
173°	TDZE	5357
	Apt Elev	5434

RNAV (RNP) Z RWY 16L

DENVER INTL (DEN)

For uncompensated Baro-VNAV systems, procedure NA below -25°C (-13°F) or above 45°C (114°F). GPS required. For inoperative MALSR, increase RNP 0.10 all Cats visibility to RVR 4000 and RNP 0.30 all Cats visibility to RVR 5000. Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR

MISSED APPROACH: Climb to 5900 then climbing right turn to 10000 direct BINBE and hold, continue climb-in-hold to 10000.

D-ATIS	DENVER APP CON	DENVER TOWER	GND CON
125.6 379.9	119.3 307.3 (N) 120.35 379.3 (S)	135.3 351.95	121.35 379.175 (W) 121.85 377.1 (E)

RADAR REQUIRED

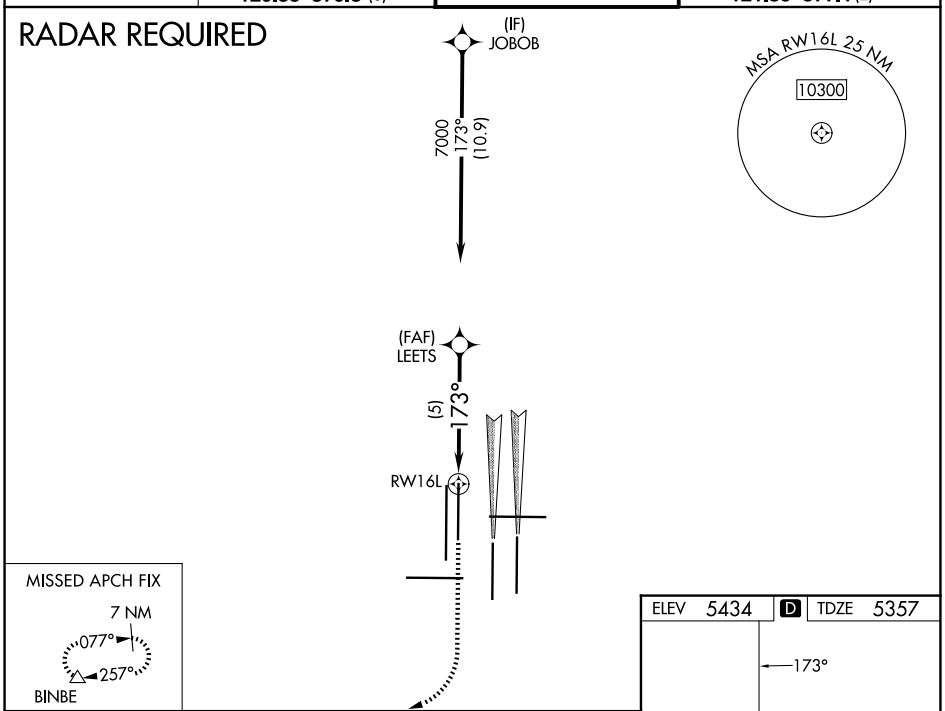

CATEGORY	A	B	C	D
RNP 0.10 DA	5617/24 260 (200-½)			
RNP 0.30 DA	5683/32 326 (300-⅝)			

AUTHORIZATION REQUIRED

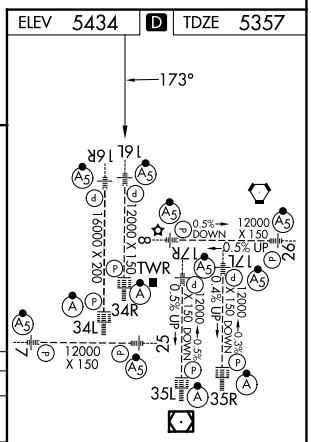

HIRL all Rwys
TDZ/CL Rwys 7, 16L, 16R, 17R, 26, 34L, 34R, 35L, 35R

SW-1, 19 FEB 2026 to 19 MAR 2026