

WAAS CH 90526 W21A	APP CRS 207°	Rwy Ldg 5003 TDZE 537 Apt Elev 537
--	------------------------	---


RNAV (GPS) RWY 21
OHIO COUNTY (JQD)

RNP APCH - GPS.


▼ Baro-VNAV NA when using Owensboro altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Owensboro altimeter setting and increase LPV DA to 858 feet, increase LNAV/VNAV DA to 1082 feet. Increase all MDA 80 feet, increase LNAV/VNAV visibilities all Cats ¼ SM, increase LNAV and Circling Cat C visibility ¼ SM. Rwy 21 helicopter visibility reduction below 1 SM NA. Procedure NA at night.

MISSED APPROACH:
Climb to 3000 direct
VUSWO and on track
273° to CCT DME
and hold.

AWOS-3PT 132.1	EVANSVILLE APP CON ★ 124.025 290.9	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

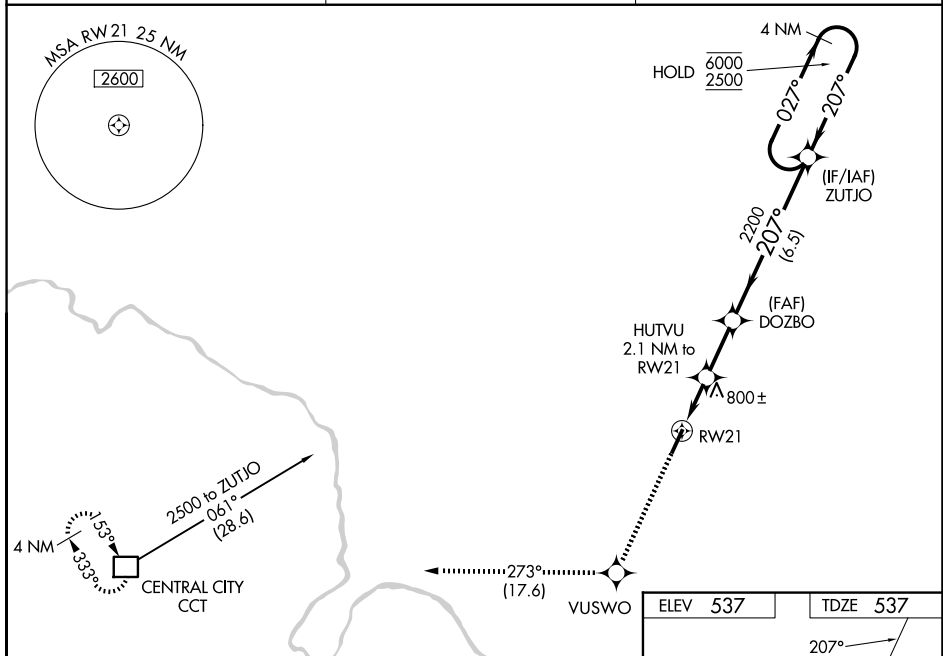

3000 ↑	VUSWO ✱	CCT ir 273° □				
CATEGORY	A		B		C	D
LPV DA	787-1		250 (300-1)		807-1 270 (300-1)	NA
LNAV/ VNAV	DA		1011-1 $\frac{3}{8}$ 474 (500-1 $\frac{3}{8}$)			NA
LNAV MDA	1060-1		523 (600-1)		1060-1 $\frac{1}{2}$ 523 (600-1 $\frac{1}{2}$)	NA
CIRCLING	1060-1 523 (600-1)		1100-1 563 (600-1)		1300-2 $\frac{1}{4}$ 763 (800-2 $\frac{1}{4}$)	NA

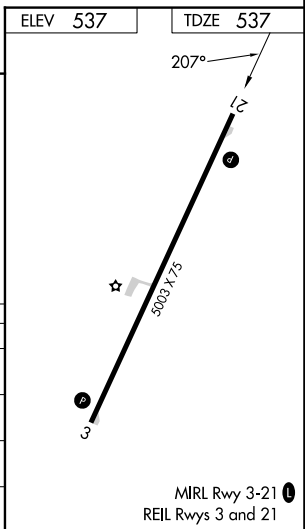

RNAV (GPS) RWY 21

SE-1, 19 FEB 2026 to 19 MAR 2026