

APP CRS	Rwy Ldg	3220
204°	TDZE	61
	Apt Elev	61

RNAV (GPS) RWY 20


CHEVAK (VAK)(PAVA)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Baro-VNAV and VDP NA when using HPB/PAHP altimeter setting. When local altimeter setting not received, use HPB/PAHP altimeter setting and increase LNAV/VNAV DA to 352 feet; increase all MDAs 60 feet and LNAV visibility Cat C/D ½ SM and Circling visibility Cat D ¼ SM.

MISSED APPROACH: Climb to 500, then climbing left turn to 3000 direct PEYKI and hold.

AWOS-3P 120.625	ANCHORAGE CENTER 124.5	UNICOM 122.8 0	CTAF 123.0 0
--------------------	---------------------------	-------------------	-----------------

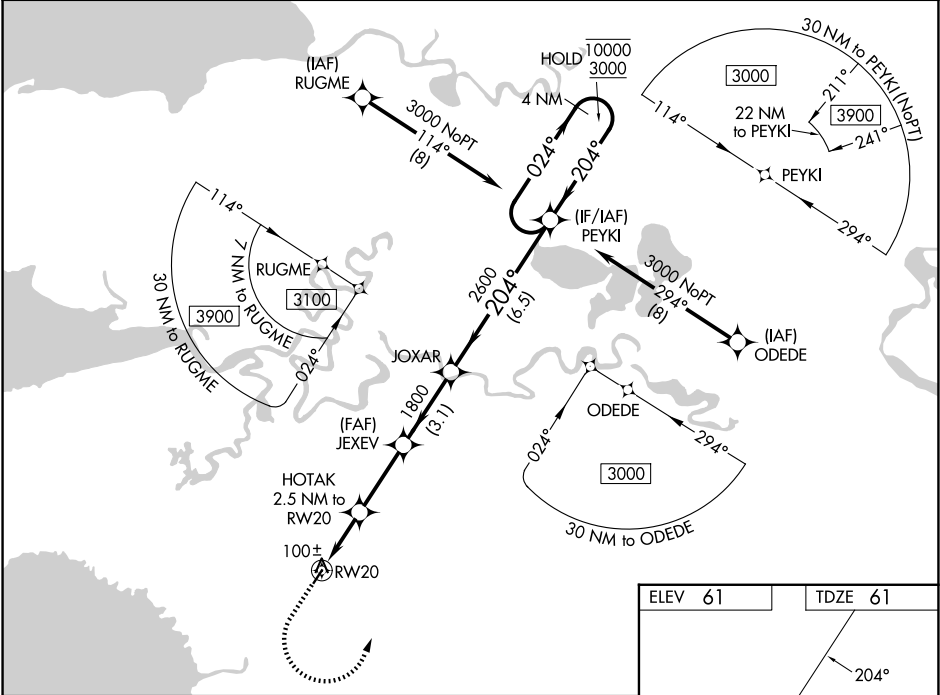

500	3000	PEYKI	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).			
CATEGORY	A		B	C	D	
LNAV/ VNAV DA	311-1		250 (300-1)			
LNAV MDA	420-1		359 (400-1)			
CIRCLING	520-1	459 (500-1)	520-1½ 459 (500-1½)	700-2 639 (700-2)		

