

WAAS CH 93628 W25A	APP CRS 254°	Rwy Idg TDZE Apt Elev	5000 1122 1122
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 25
BELLEFONTAINE RGNL (EDJ)

RNP APCH - GPS

NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 36°C.
Rwy 25 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use James M Cox Dayton Intl altimeter setting and increase LPV DA to 1555 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 1762 feet; increase all MDAs 100 feet and LNAV visibility Cat B ¼ SM, Cat C and D ½ SM, and Circling visibility Cat B ¼ SM, Cat C ½ SM, Cat D ¼ SM. Baro-VNAV and VDP NA when using James M Cox Dayton Intl altimeter setting.

MISSED APPROACH:
Climb to 1900 then climbing left turn to 3000 direct ROD VORTAC and hold.

AWOS-3 118.075	COLUMBUS APP CON 134.45 294.5	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

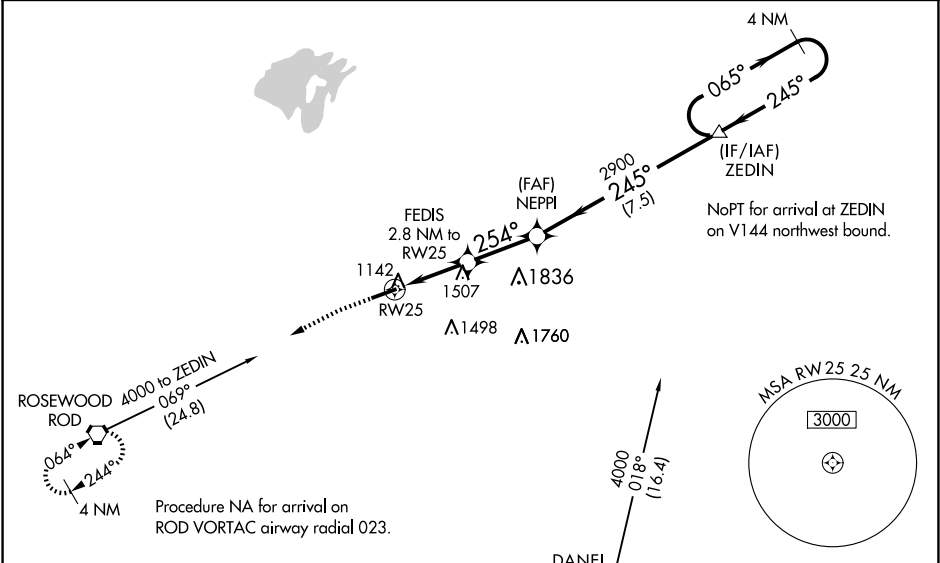

1900 3000 ROD

VGSI and RNAV glidepath not coincident (VGSI Angle 4.00/TCH 57).

ZEDIN 4 NM Holding Pattern

FEDIS 2.8 NM to RW25

NEPPI 2900

RW25 2040

GP 3.00° TCH 40

1.5 NM 1.3 NM 2.7 NM 7.5 NM

CATEGORY	A	B	C	D
LPV DA	1457-1⅛		335 (400-1⅛)	
LNAV/VNAV DA	1664-1⅞		542 (600-1⅞)	
LNAV MDA	1820-1 698 (700-1)		1820-2 698 (700-2)	
CIRCLING	1820-1 698 (700-1)		1860-2 738 (800-2)	1980-2¾ 858 (900-2¾)

MIRL Rwy 7-25 0

REIL Rwy 7 and 25 0

EC-2, 19 FEB 2026 to 19 MAR 2026

EC-2, 19 FEB 2026 to 19 MAR 2026