

|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>78209</b><br><b>W20A</b> | APP CRS<br><b>206°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>5500</b><br><b>1020</b><br><b>1028</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|

RNAV (GPS) RWY 20



MOREHEAD-ROWAN COUNTY CLYDE A THOMAS RGNL (SYM)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Mount Sterling altimeter setting. When local altimeter setting not received, use Mount Sterling altimeter setting: increase all DA 50 feet and all MDA 60 feet; increase LPV and LNAV/VNAV all Cats visibility ½ mile, LNAV Cats C/D visibility ½ mile, and Circling Cats C/D visibility ¼ mile.

MISSED APPROACH:  
Climb to 3600 direct CIPUL and hold.

|                         |                                               |                                 |
|-------------------------|-----------------------------------------------|---------------------------------|
| AWOS-3<br><b>119.95</b> | INDIANAPOLIS CENTER<br><b>124.225 360.725</b> | UNICOM<br><b>122.7 (CTAF) 0</b> |
|-------------------------|-----------------------------------------------|---------------------------------|

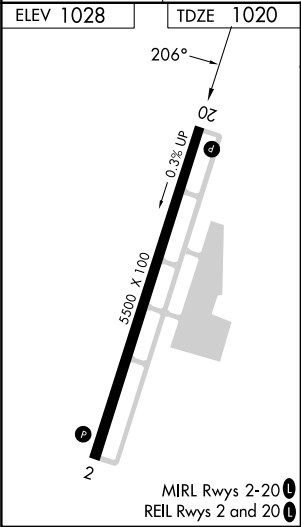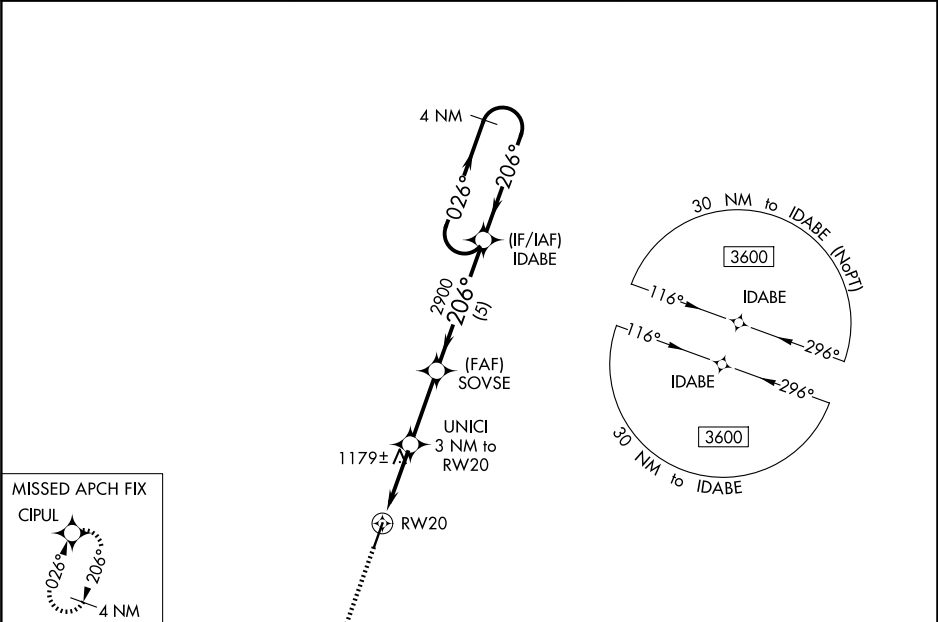

|              |        |                    |                    |                            |                      |
|--------------|--------|--------------------|--------------------|----------------------------|----------------------|
| 3600         | CIPUL  | UNICI 3 NM to RW20 | SOVSE 2900         | IDABE                      | 4 NM Holding Pattern |
| *LNAV only   |        | *1.2 NM to RW20    | *2000              | 2900                       | GP 3.00° TCH 40      |
| 1.2 NM       | 1.8 NM | 2.8 NM             | 5 NM               |                            |                      |
| CATEGORY     | A      | B                  | C                  | D                          |                      |
| LPV DA       |        | 1270-7/8           | 250 (300-7/8)      |                            |                      |
| LNAV/VNAV DA |        | 1453-1 1/2         | 433 (500-1 1/2)    |                            |                      |
| LNAV MDA     | 1440-1 | 420 (500-1)        | 1440-1 1/4         | 420 (500-1 1/4)            |                      |
| CIRCLING     | 1520-1 | 492 (500-1)        | 1760-2 732 (800-2) | 1820-2 1/2 792 (700-2 1/2) |                      |