

WAAS
CH **78313**
W24A

APP CRS
244°

Rwy Ldg
TDZE
Apt Elev
4000
55
55

RNAV (GPS) RWY 24

ROBERT/BOB/CURTIS MEML (D76) (PF'NO)

RNP APCH.

▼

▲


❄

For uncompensated Baro-VNAV systems,
LNAV/VNAV NA below -20°C or above
54°C.

-22°C

MISSED APPROACH: Climb to 2700 direct ODMEE and hold,
continue climb-in-hold to 2700.

AWOS-3P 120.0	ANCHORAGE CENTER 119.2 263.0	CTAF 122.7
-------------------------	--	----------------------

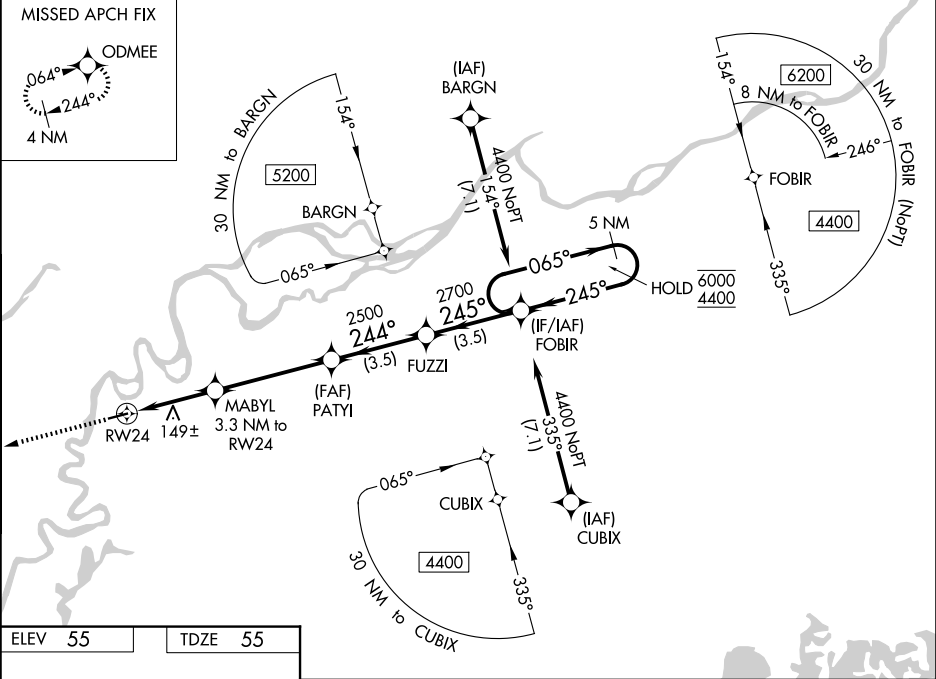

ELEV 55	TDZE 55
---------	---------

2700 ODMEE

↑

✦

*LNAV only

MABYL 3.3 NM to RW24

*1.2 NM to RW24

RW24

4000 X 100

244°

24

PATYI 2500

FUZZI

FOBIR

5 NM Holding Pattern

065° → 6000

← 245° 4400

GP 3.00°

TCH 40

1120*

1.2

2.1 NM

4.3 NM

3.5 NM

3.5 NM

CATEGORY	A	B	C	D
LPV DA	305-1 250 (300-1)			
LNAV/VNAV DA	355-1 300 (300-1)			
LNAV MDA	460-1	405 (500-1)	460-1½	405 (500-1½)
CIRCLING	520-1	465 (500-1)	520-1½ 465 (500-1½)	760-2¼ 705 (800-2¼)

MIRL Rwy 6-24