

WAAS CH <b>69537</b> <b>W34A</b>	APP CRS <b>340°</b>	Rwy Ldg <b>3500</b> TDZE <b>1482</b> Apt Elev <b>1482</b>
--	------------------------	---


# RNAV (GPS) RWY 34

CANDO MUNI (9D7)

**▽** DME/DME RNP-0.3 NA. When local altimeter not received, use Devils Lake altimeter setting and increase all DA 63 feet and all MDA 80 feet. Increase LPV visibility  $\frac{1}{8}$  mile all Cats and LNAV/VNAV visibility  $\frac{1}{4}$  mile all Cats. Baro-VNAV and VDP NA when using Devils Lake altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (0°F) or above 54°C (130°F).


**MISSED APPROACH:**  
Climb to 1900 then  
climbing left turn to 3600  
direct CAREW and hold.

AWOS-3 <b>118.325</b>	MINNEAPOLIS CENTER <b>124.2 270.3</b>	CTAF <b>122.9</b> <b>0</b>
--------------------------	--	-------------------------------

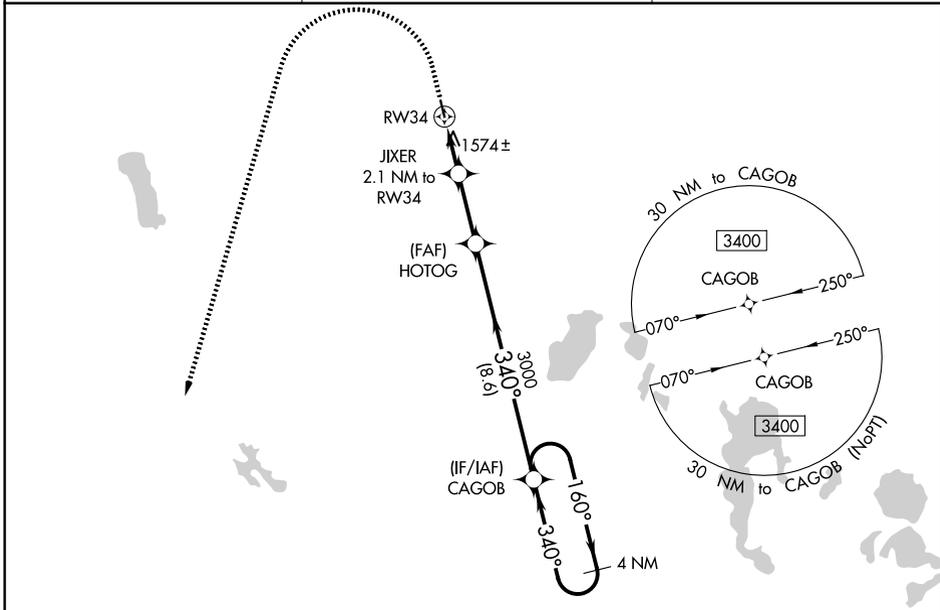


NC-1, 19 FEB 2026 to 19 MAR 2026

NC-1, 19 FEB 2026 to 19 MAR 2026

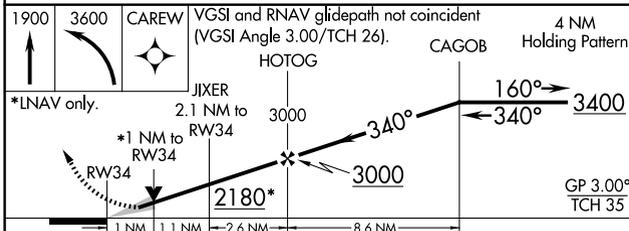

ELEV <b>1482</b>	TDZE <b>1482</b>
------------------	------------------

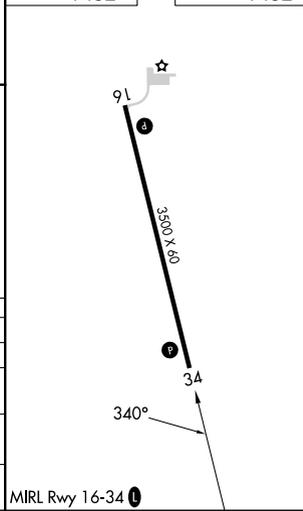

CATEGORY	A	B	C	D
LPV DA	1732-1	250 (300-1)		NA
LNAV/VNAV DA	1871-1 $\frac{3}{8}$	389 (400-1 $\frac{3}{8}$ )		NA
LNAV MDA	1840-1	358 (400-1)		NA
CIRCLING	1900-1 418 (500-1)	1940-1 458 (500-1)		NA