

WAAS CH <b>82047</b> <b>W31A</b>	APP CRS <b>311°</b>	Rwy Ldg TDZE Apt Elev	<b>3798</b> <b>3505</b> <b>3505</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 31




EKALAKA (97M)

RNP APCH - GPS.

**NA** Baro-VNAV NA. Rwy 31 helicopter visibility reduction below 3/4 SM NA. Use BHK altimeter setting; when not received, use BWW altimeter setting and increase LPV DA to 3960 feet and all visibilities 1/4 SM, increase LNAV/VNAV DA to 4460 feet; increase all MDAs 60 feet and LNAV visibility Cat B/C/D 1/2 SM.

MISSED APPROACH: Climb to 7000 direct ELTRO and hold, continue climb-in-hold to 7000.

BHK ASOS <b>135.475</b>	SALT LAKE CENTER <b>126.85 305.2</b>	CTAF <b>122.9</b>
----------------------------	---	----------------------

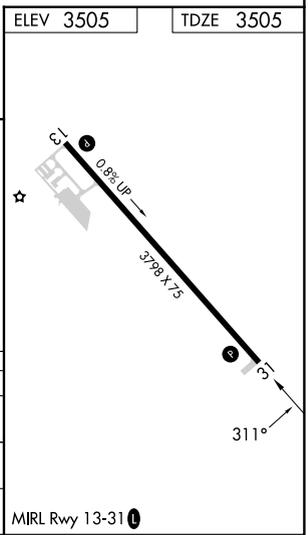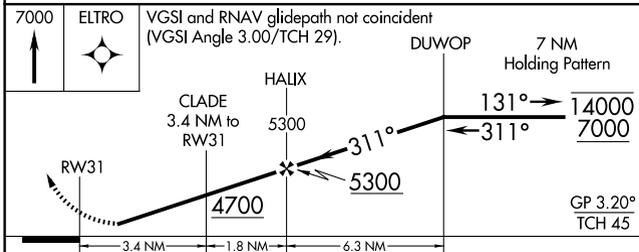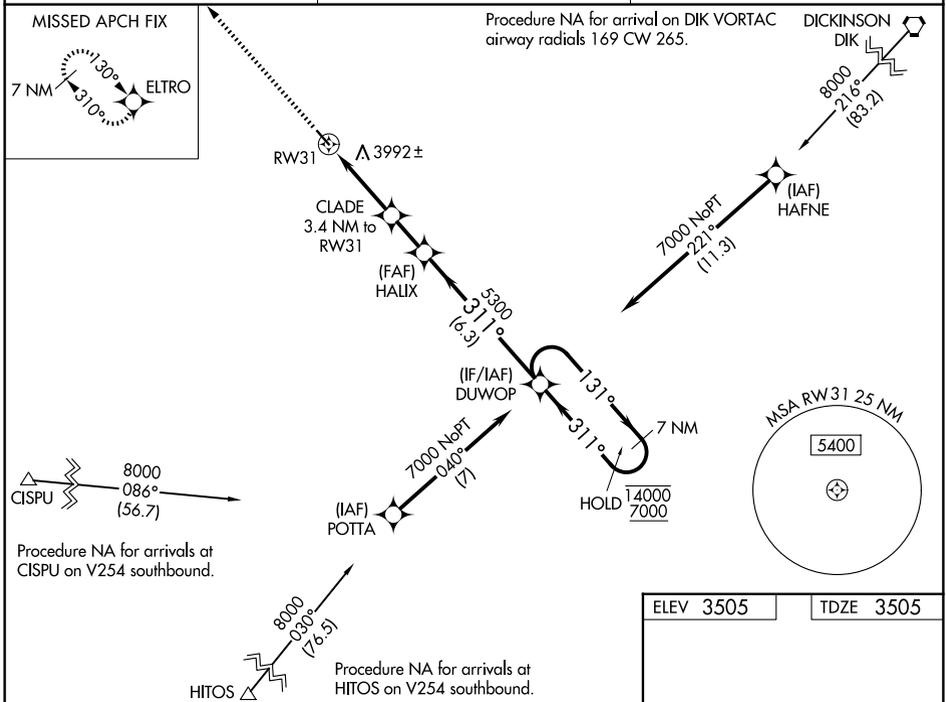

CATEGORY	A	B	C	D
LPV DA		3900-1 1/8	395 (400-1 1/8)	
LNAV/VNAV DA		4400-2 1/2	895 (900-2 1/2)	
LNAV MDA	4400-1 1/4 895 (900-1 1/4)	4400-1 1/2 895 (900-1 1/2)	4400-3	895 (900-3)

NW-1, 19 FEB 2026 to 19 MAR 2026

NW-1, 19 FEB 2026 to 19 MAR 2026