

APP CRS	Rwy Ldg 10000
003°	TDZE 707
	Apt Elev 748

RNAV (RNP) Z RWY 36C

CHARLOTTE/DOUGLAS INTL (CLT)




RNP AR APCH - GPS.

Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -8°C or above 54°C. For inop ALS, increase RNP 0.30 visibility all Cats to 1½ SM.



MISSED APPROACH: Climb to 3000 on track 003° to TOMME and hold.

D-ATIS	CHARLOTTE APP CON	CHARLOTTE TOWER	GND CON
121.15	128.325 (001°-119°) 120.05 (120°-295°) 134.75 (296°-360°)	118.1 257.8 (Rwys 18L-36R) 126.4 257.8 (Rwy 18C-36C) 133.35 257.8 (Rwy 18R-36L)	121.8 348.6 (W) 121.9 348.6 (E)

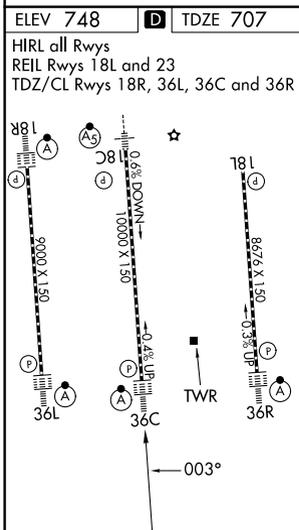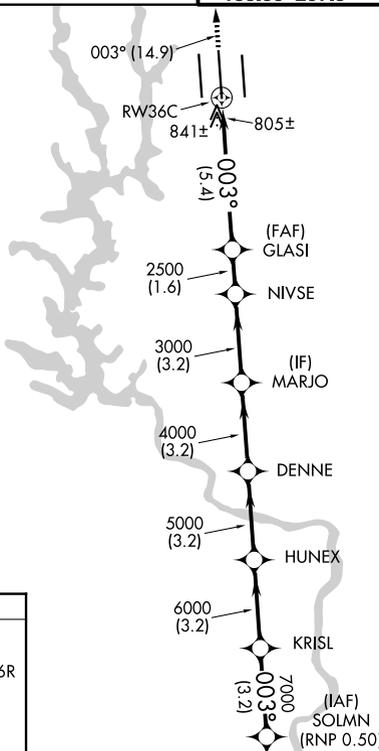

3000	TOMME	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 72).					SOLMNX
↑	003°	GLASI	NIVSE	MARJO	DENNE	HUNEX	KRISL
		2500	3000	4000	5000	6000	7000
		5.4 NM	1.6 NM	3.2 NM	3.2 NM	3.2 NM	3.2 NM
RW36C							8000
							GP 3.05° TCH 57
CATEGORY	A	B		C		D	
RNP 0.11 DA	1134/40 427 (400-¾)						
RNP 0.30 DA	1180/50 473 (500-1)						

AUTHORIZATION REQUIRED

SE-2, 19 MAR 2026 to 16 APR 2026

SE-2, 19 MAR 2026 to 16 APR 2026