

WAAS CH 77500 W18A	APP CRS 183°	Rwy Ldg TDZE Apt Elev 8676 748 748
--	------------------------	--

RNAV (GPS) Y RWY 18L


CHARLOTTE/DOUGLAS INTL (CLT)

RNP APCH.

- V** Circling NA at night. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.
- A** Rwy 18L helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C.

MISSED APPROACH: Climb to 1300 then climbing left turn to 4000 direct LOC and hold.

D-ATIS	CHARLOTTE APP CON	CHARLOTTE TOWER	GND CON
121.15	128.325 (001°-119°) 120.05 (120°-295°) 134.75 (296°-360°)	118.1 257.8 (Rwys 18L-36R) 126.4 257.8 (Rwy 18C-36C) 133.35 257.8 (Rwy 18R-36L)	121.8 348.6 (W) 121.9 348.6 (E)

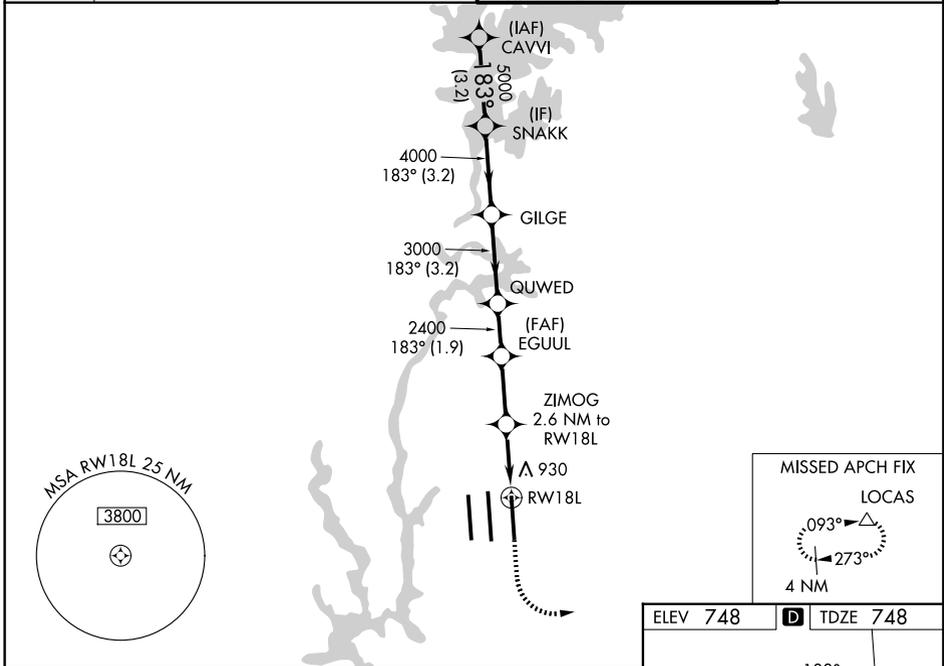

SE-2, 19 MAR 2026 to 16 APR 2026

SE-2, 19 MAR 2026 to 16 APR 2026

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 76).

CAVVI	SNAKK	GILGE	QUWED	EGUUL	ZIMOG	RW18L
6000	5000	4000	3000	2400	2400	4000
GP 3.00° TCH 56						
	3.2 NM	3.2 NM	1.9 NM	2.4 NM	1.5 NM	1.1 NM
CATEGORY	A		B	C	D	
LPV DA	1002/40		254 (300-¾)			
LNAV/VNAV DA	1216-1⅜		468 (500-1⅝)			
LNAV MDA	1180/55	432 (500-1)	1180-1¼	432 (500-1¼)		
CIRCLING	1380-1	632 (700-1)	1500-2¼	752 (800-2¼)	1500-2½	752 (800-2½)

