
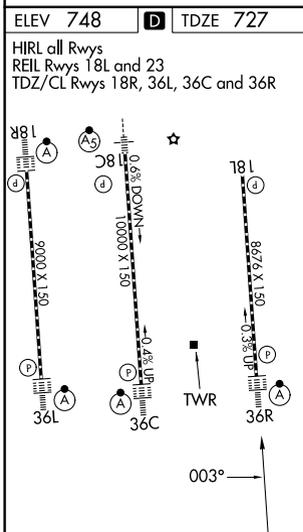


WAAS CH 90100 W36D	APP CRS 003°	Rwy Ldg TDZE 727 Apt Elev 748
--	------------------------	---

RNAV (GPS) Y RWY 36R

CHARLOTTE/DOUGLAS INTL (CLT)

RNP APCH.		ALSF-2		MISSED APPROACH: Climb to 1320 then climbing right turn to 4000 direct LOCAS and hold.	
<p>▽ Circling NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations. For inop ALSF, increase LNAV/VNAV all Cats visibility to 1½ mile.</p>					
D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER		GND CON
121.15	128.325 (001°-119°) 120.05 (120°-295°) 134.75 (296°-360°)	257.2 (180°-359°) 307.8 (360°-179°)	118.1 (Rwys 18L-36R) 126.4 (Rwy 18C-36C) 133.35 (Rwy 18R-36L)	257.8 (Rwys 18L-36R) 257.8 (Rwy 18C-36C) 257.8 (Rwy 18R-36L)	121.8 348.6 (W) 121.9 348.6 (E)

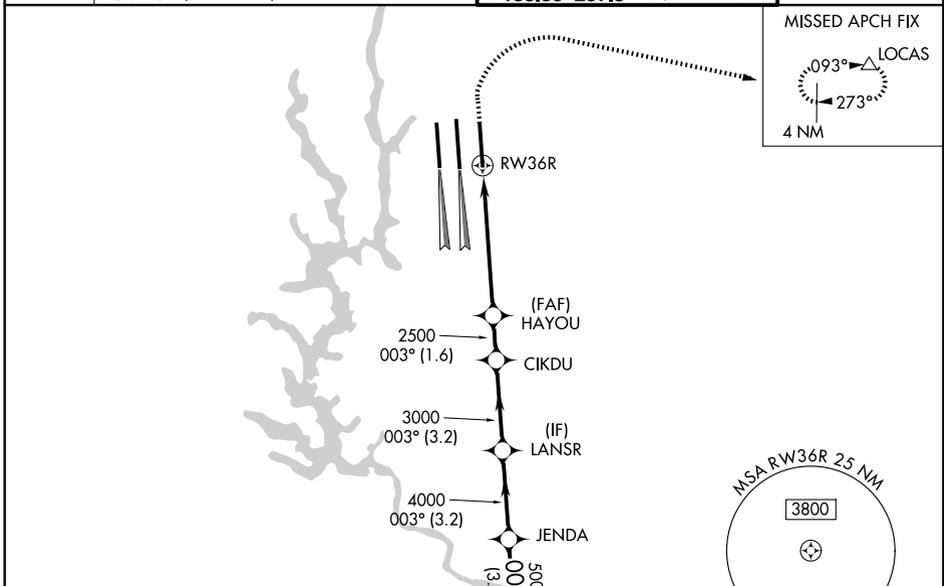

1320	4000	LOCAS	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 74).		HEKAM
*LNAV only.					
CATEGORY	A	B	C	D	
LPV DA	927/18		200 (200-½)		
LNAV/VNAV DA	1229-1¼		502 (500-1¼)		
LNAV MDA	1320/24	593 (600-½)	1320-1¼	593 (600-1¼)	
CIRCLING	1380-1	632 (700-1)	1500-2¼ 752 (800-2¼)	1500-2½ 752 (800-2½)	

SE-2, 19 MAR 2026 to 16 APR 2026

SE-2, 19 MAR 2026 to 16 APR 2026