WAAS CH 65847 W13A	APP CRS 138°	Rwy Ldg 6059 TDZE 611 Apt Elev 620

RNAV (GPS) Z RWY 13L
CHICAGO MIDWAY INTL (MDW)

RNP APCH - GPS.

Rwy 13L helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C.

MISSED APPROACH: Climb to 1100 then climbing right turn to 2600 direct EON VORTAC and hold.

D-ATIS	CHICAGO APP CON	MIDWAY TOWER	GND CON	CLNC DEL	CPDLC
132.75	128.2 353.875	135.2 269.125	118.075	124.625	

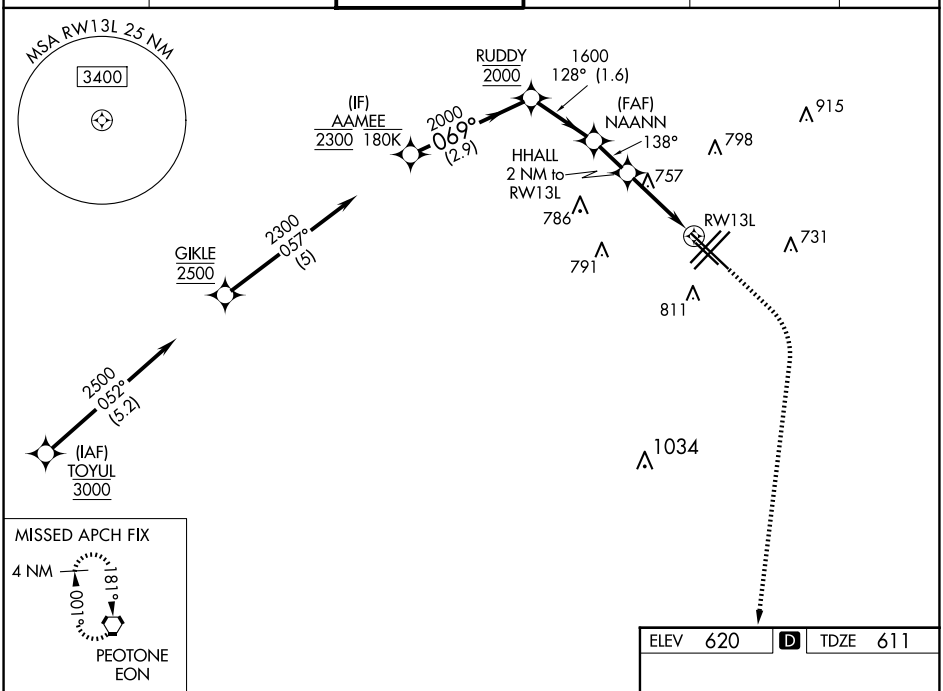

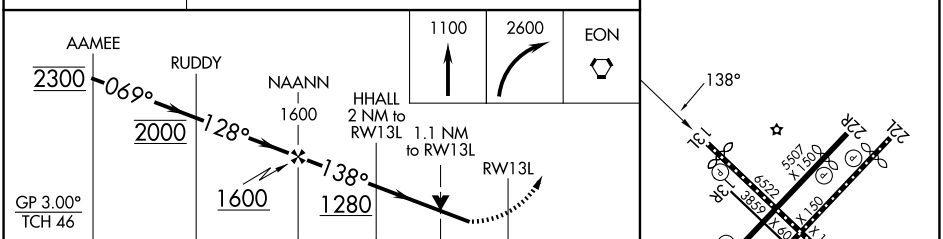

CATEGORY	A	B	C	D
LPV DA	861/40 250 (300-¾)			
LNAV\VNAV DA	1034-1¼ 423 (500-1¼)			
LNAV MDA	1020/55 409 (400-1)		1020/60 409 (400-1¼)	
C CIRCLING	1120-1 500 (500-1)		1340-2 720 (800-2)	1340-2¼ 720 (800-2¼)

ELEV 620 D TDZE 611

REIL Rwys 4R, 22L and 31R
RLLS Rwys 13L and 31R
HIRL Rwys 4R-22L and 13L-31R
MIRL Rwys 4L-22R and 13R-31L

EC-3, 19 MAR 2026 to 16 APR 2026

EC-3, 19 MAR 2026 to 16 APR 2026