


APP CRS	Rwy Ldg	11260
273°	TDZE	654
	Apt Elev	680

RNAV (RNP) Y RWY 27L

CHICAGO O'HARE INTL (ORD)


RNP AR APCH - GPS.				MISSED APPROACH: Climb to 4000 on track 273° to WASCO and hold.	
Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C.					
D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON (TWR CENTER)	CLNC DEL	CPDLC
135.4 282.225	119.0 292.125	126.9 348.0	124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRs)	121.75 (OBND) 121.9 (IBND)	121.6

RADAR REQUIRED

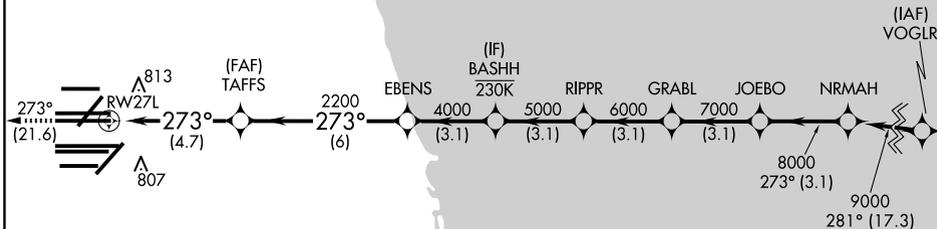


MISSED APCH FIX

WASCO



ELEV	680	D	TDZE	654
------	------------	----------	------	------------

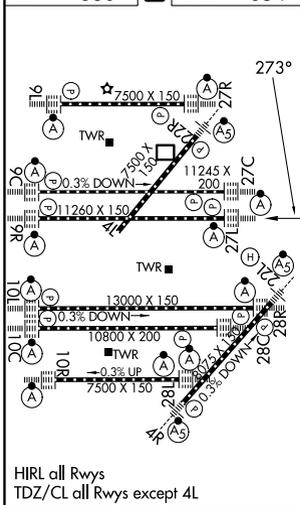

4000	↑	tr 273°	WASCO	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 77).	NRMAH	9000			
			TAFS	EBENS	BASHH	RIPPR	GRABL	JOEBO	273°
			2200	4000	5000	6000	7000	8000	9000
			← 4.7 NM →	← 6 NM →	← 3.1 NM →	← 3.1 NM →	← 3.1 NM →	← 3.1 NM →	← 3.1 NM →
CATEGORY			A	B	C	D			
RNP 0.15 DA			989/26		335 (400-½)				
RNP 0.30 DA			1133/50		479 (500-1)				

AUTHORIZATION REQUIRED