

| | | |
|----------------------------------------|------------------------|----------------------------------------------------------------|
| WAAS CH 77706 W23B | APP CRS 230° | Rwy Ldg 11200 TDZE 783 Apt Elev 796 |
|----------------------------------------|------------------------|----------------------------------------------------------------|

RNAV (GPS) Y RWY 23R


INDIANAPOLIS INTL (IND)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inoperative ALS, increase LNAV Cat C/D visibility to RVR 6000. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.
**** RVR 1800 authorized with use of FD or AP or HUD to DA.**





MISSED APPROACH:
Climb to 1500 then climbing right turn to 3000 direct KEADY and hold.

| | | | | | |
|-------------------------|----------------------------------------------|----------------------------------|-------------------------|---------------------------------|-------|
| D-ATIS 134.25 | INDIANAPOLIS APP CON 128.175 317.8 | INDY TOWER 120.9 251.1 | GND CON 121.9 | CLNC DEL 128.75 251.1 | CPDLC |
|-------------------------|----------------------------------------------|----------------------------------|-------------------------|---------------------------------|-------|

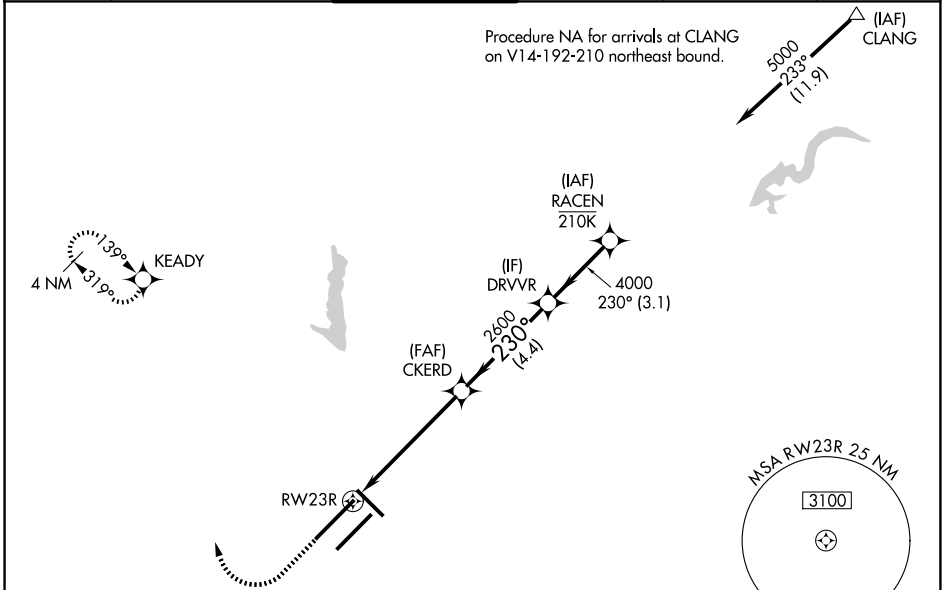

| | | |
|----------|----------|----------|
| ELEV 796 | D | TDZE 783 |
|----------|----------|----------|

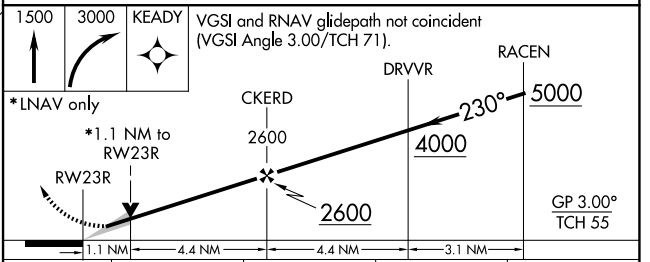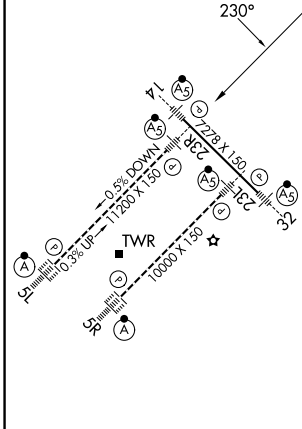

| CATEGORY | A | B | C | D |
|--------------|----------|-------------|-------------------------|-------------------------|
| LPV DA | **983/24 | | 200 (200-½) | |
| LNAV/VNAV DA | 1165/40 | | 382 (400-¾) | |
| LNAV MDA | 1200/24 | 417 (500-½) | 1200/40 | 417 (500-¾) |
| CIRCLING | 1420-1 | 624 (700-1) | 1420-1¾ 624 (700-1¾) | 1560-2½ 764 (800-2½) |

HIRL all Rwys
TDZ/CL Rwys 5L and 5R

EC-2, 19 MAR 2026 to 16 APR 2026

EC-2, 19 MAR 2026 to 16 APR 2026