


LOC/DME I-RLI <b>109.35</b>	APP CRS <b>350°</b>	Rwy Ldg TDZE <b>10000</b> <b>464</b>
Chan <b>30</b> (Y)		Apt Elev <b>501</b>

# ILS or LOC RWY 35L


LOUISVILLE MUHAMMAD ALI INTL (SDF)

DME required for LOC only. RADAR required.	ALSF-2 	MISSED APPROACH: Climb to 1000 then climbing left turn to 4000 on heading 240° and IJU VORTAC R-279 to DAMEN INT/ IJU 24.5 DME and hold.
Simultaneous approach authorized. Circling Rwy 11 NA at night. For inop ALS, increase S-LOC 35L Cat C/D visibility to 1 3/4 SM.		


D-ATIS <b>118.725</b>	LOUISVILLE APP CON <b>132.075 327.0</b>	LOUISVILLE TOWER <b>124.2 257.8</b>	GND CON <b>121.7 348.6</b>
--------------------------	--	--	-------------------------------

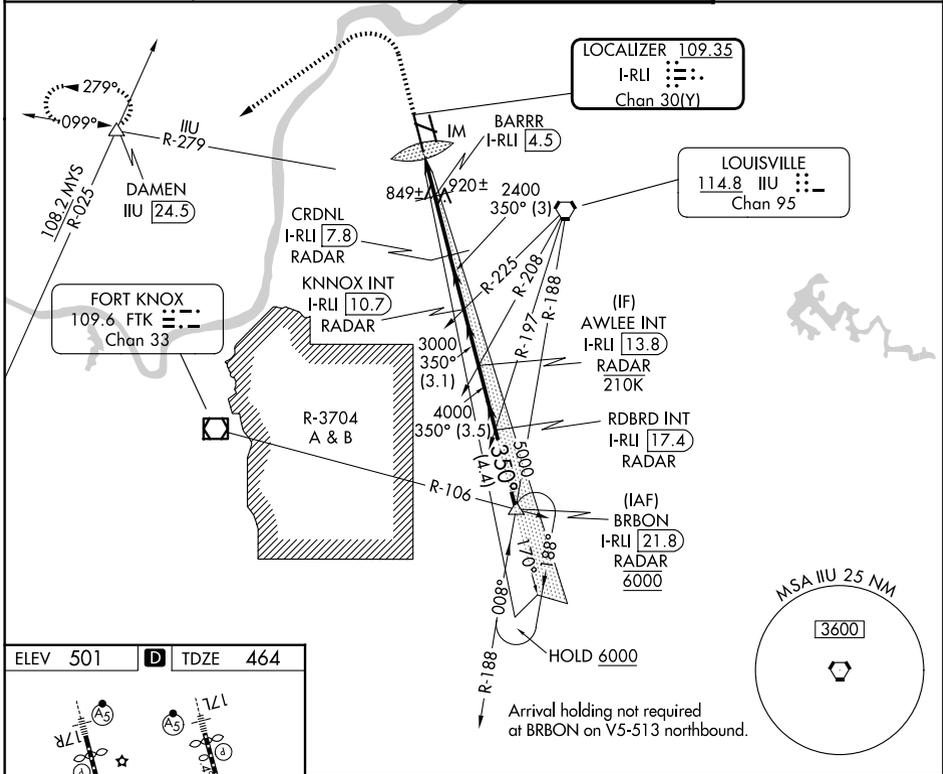

ELEV 501	<b>D</b>	TDZE 464
----------	----------	----------

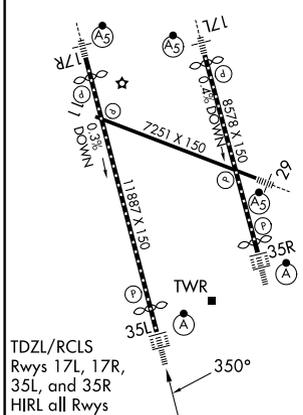

FAF to MAP 5.9 NM					
Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58

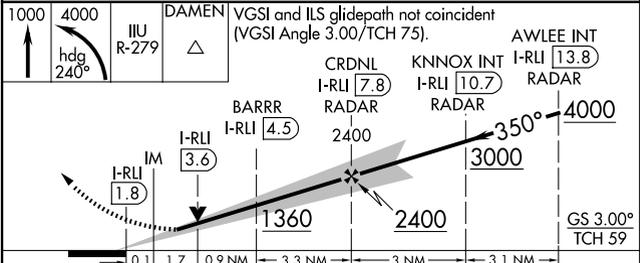

CATEGORY	A				B		C		D	
S-ILS 35L	664/18 200 (200-1/2)									
S-LOC 35L	1100/24 636 (600-1/2)			1100-1 3/4 636 (600-1 3/8)						
CIRCLING	1100-1 599 (600-1)		1140-1 639 (700-1)		1160-1 3/4 659 (700-1 3/4)		1400-3 899 (900-3)			

SE-1, 19 MAR 2026 to 16 APR 2026

SE-1, 19 MAR 2026 to 16 APR 2026