


LOC I-LKS 109.1	APP CRS 297°	Rwy Ldg TDZE 7250 480 Apt Elev 501
---------------------------	------------------------	---

LOC RWY 29


LOUISVILLE MUHAMMAD ALI INTL (SDF')

RADAR required. ADF or DME required.		MALSR 	MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 heading 268° and on ILL VORTAC R-279 to DAMEN and hold.
 Circling Rwy 11 NA at night. Rwy 29 helicopter visibility reduction below RVR 4000 NA. For inop ALS, increase S-29 visibility Cats A/B to RVR 5500 and Cats C/D to 1½ SM.			

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6
--------------------------	--	--	-------------------------------

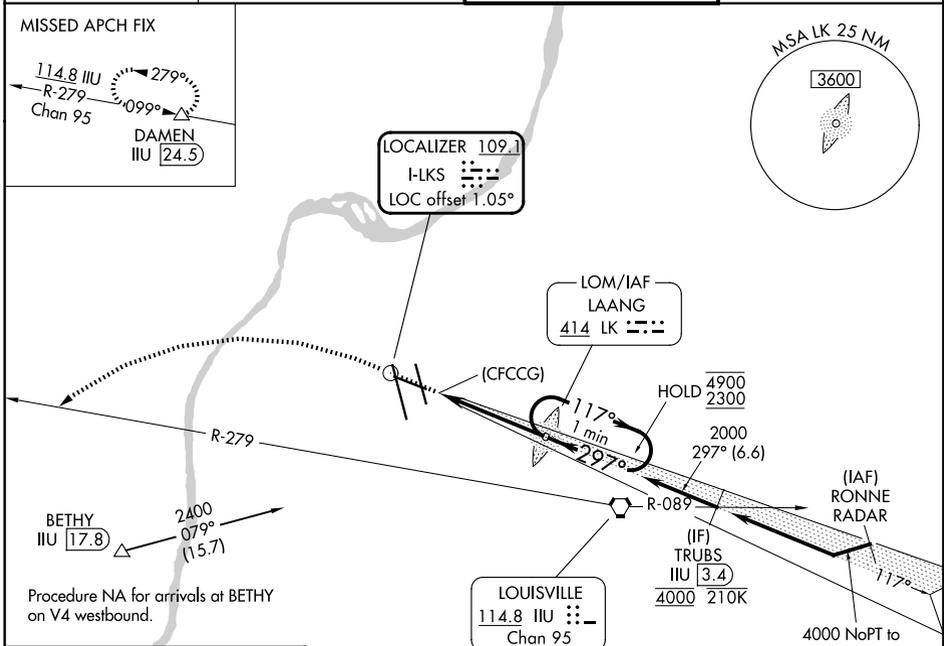

ELEV 501	D	TDZE 480
----------	----------	----------

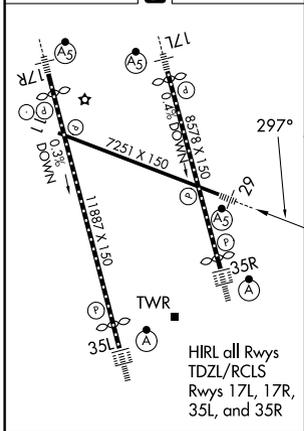

FAF to MAP 4.1 NM					
Knots	60	90	120	150	180
Min:Sec	4:06	2:44	2:03	1:38	1:22
CATEGORY	A	B	C	D	
S-29	1060/40	580 (600-¾)	1060-1¼	580 (600-1¼)	
CIRCLING	1060-1 559 (600-1)	1140-1 639 (700-1)	1160-1¾ 659 (700-1¾)	1400-3 899 (900-3)	

SE-1, 19 MAR 2026 to 16 APR 2026

SE-1, 19 MAR 2026 to 16 APR 2026