

RNAV (RNP) Z RWY 35L

LOUISVILLE MUHAMMAD ALI INTL (SDF)

| | | |
|-------------|----------|--------------|
| APP CRS | Rwy Ldg | 10000 |
| 350° | TDZE | 464 |
| | Apt Elev | 501 |

RNP AR APCH - GPS.



For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 4500.

ALSF-2





MISSED APPROACH: Climb to 1000 then climbing left turn to 4000 direct DAMEN and hold.



| | | | |
|--------------------------|--|--|-------------------------------|
| D-ATIS 118.725 | LOUISVILLE APP CON 132.075 327.0 | LOUISVILLE TOWER 124.2 257.8 | GND CON 121.7 348.6 |
|--------------------------|--|--|-------------------------------|



ROUTING TO AWLEE (not to scale)

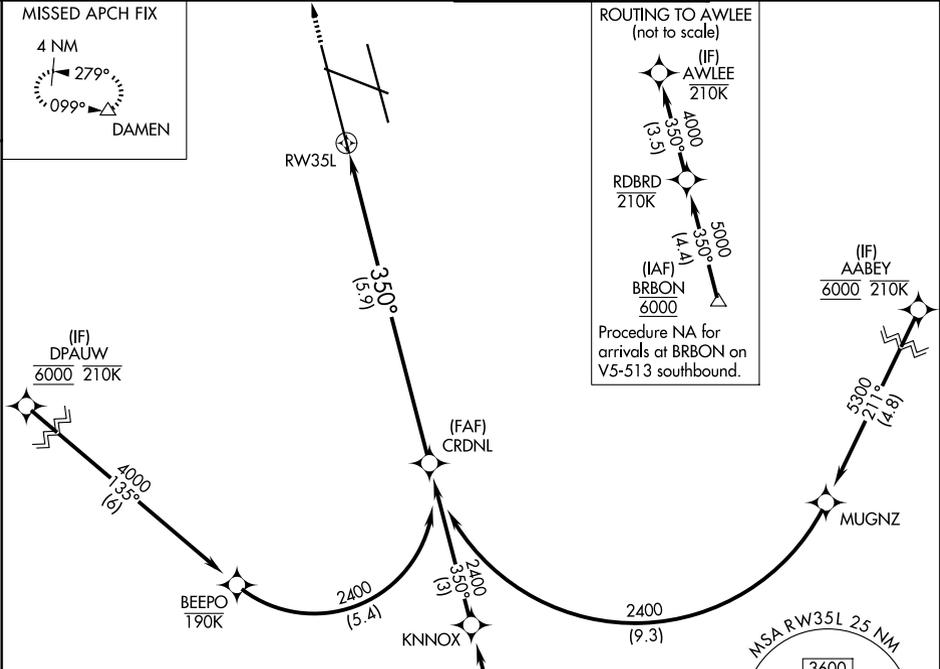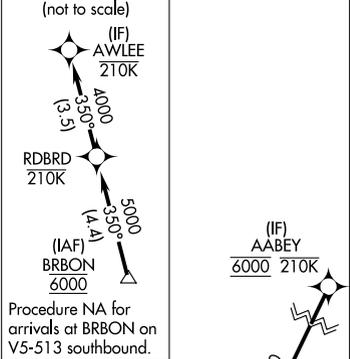

| | | |
|----------|----------|----------|
| ELEV 501 | D | TDZE 464 |
|----------|----------|----------|

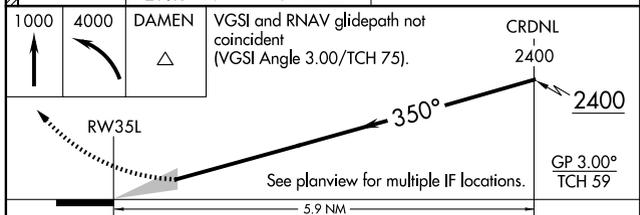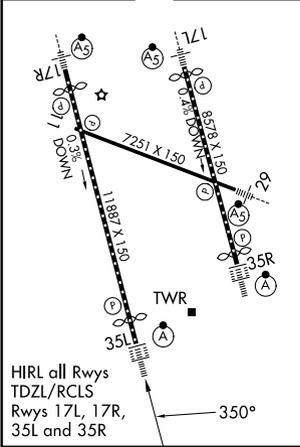

| | | | | |
|-------------|---|--------|-------------|---|
| CATEGORY | A | B | C | D |
| RNP 0.11 DA | | 769/24 | 305 (300-½) | |
| RNP 0.30 DA | | 897/40 | 433 (400-¾) | |

AUTHORIZATION REQUIRED

SE-1, 19 MAR 2026 to 16 APR 2026

SE-1, 19 MAR 2026 to 16 APR 2026