



APP CRS	Rwy Ldg	8000
301°	TDZE	822
	Apt Elev	842

RNAV (RNP) Y RWY 30R

MINNEAPOLIS-ST PAUL INTL/WOLD-CHAMBERLAIN (MSP)

RNP AR APCH - GPS. Authorization required. From HIGHA: RF.		MALSF	MISSED APPROACH: Climb to 1300 then climbing right turn to 3000 direct GEP VORTAC and hold.
For uncompensated Baro-VNAV systems, procedure NA below -20°C or above 54°C. Inop table does not apply to RNP 0.15. Simultaneous approach authorized.			

D-ATIS	MINNEAPOLIS APP CON	MINNEAPOLIS TOWER	GND CON
135.35 239.275	118.725 335.65 (35) 119.3 335.65 (4-22, 12L-30R, 17) 126.95 335.65 (12R-30L)	123.675 273.55 (17-35) 123.95 273.55 (12L-30R) 126.7 273.55 (4-22, 12R-30L)	121.8 348.6 (N) 121.9 348.6 (S) 127.925 348.6 (W)

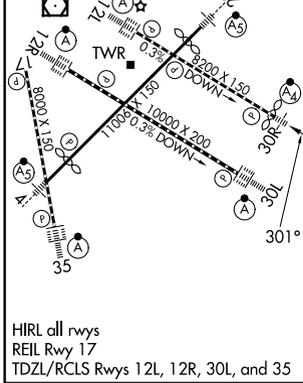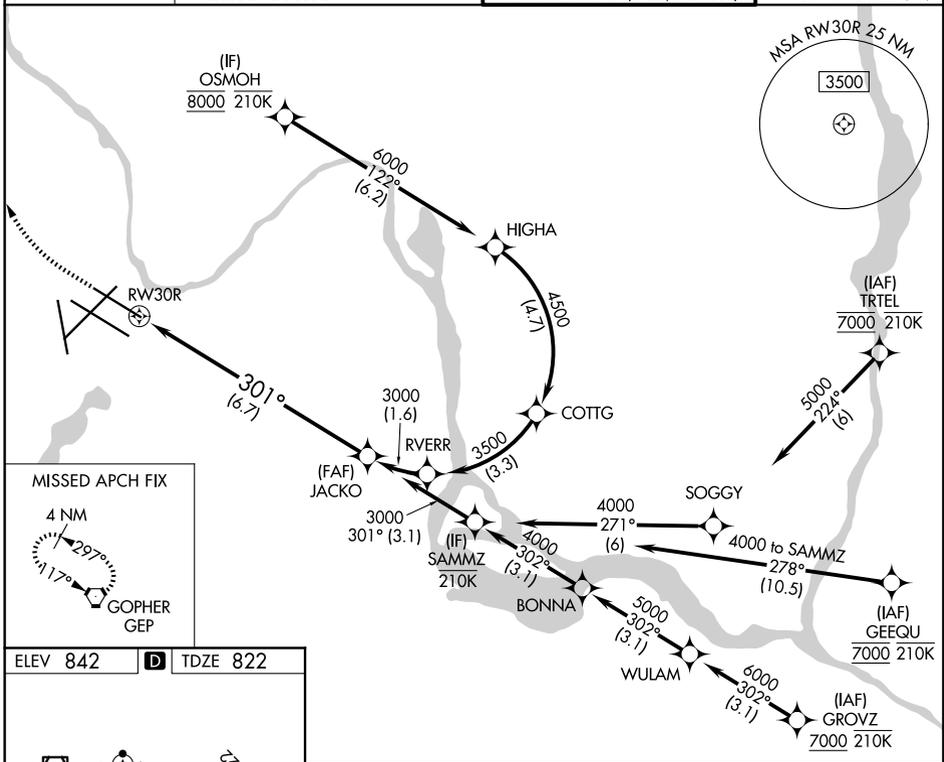

ELEV 842	D	TDZE 822			
1300	3000	GEP	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71). See planview for multiple IF locations.	JACKO	3000
RWY 30R		301°		3000	
		6.7 NM			

CATEGORY	A	B	C	D
RNP 0.15 DA		1097/50	275 (300-1)	
RNP 0.30 DA		1298/60	476 (500-1¼)	

AUTHORIZATION REQUIRED

NC-1, 19 MAR 2026 to 16 APR 2026

NC-1, 19 MAR 2026 to 16 APR 2026