



WAAS CH 97506 W15A	APP CRS 147°	Rwy Ldg TDZE Apt Elev	8502 215 219
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 15

MOBILE RGNL (MOB)


RNP APCH - GPS.		MOBILE TOWER ★		GND CON		UNICOM	
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 42°C. For inop ALS, increase LNAV Cats C/D visibility to RVR 6000. * RVR 1800 authorized with use of FD or AP or HUD to DA.		MALSR 		MISSED APPROACH: Climb to 2000 direct JOTEN and on track 189° to SAINT and hold.			
ATIS	MOBILE APP CON ★	MOBILE TOWER ★		GND CON		UNICOM	
124.75 257.85	118.5 269.3	118.3 (CTAF) 239.0		121.9 348.6		122.95	

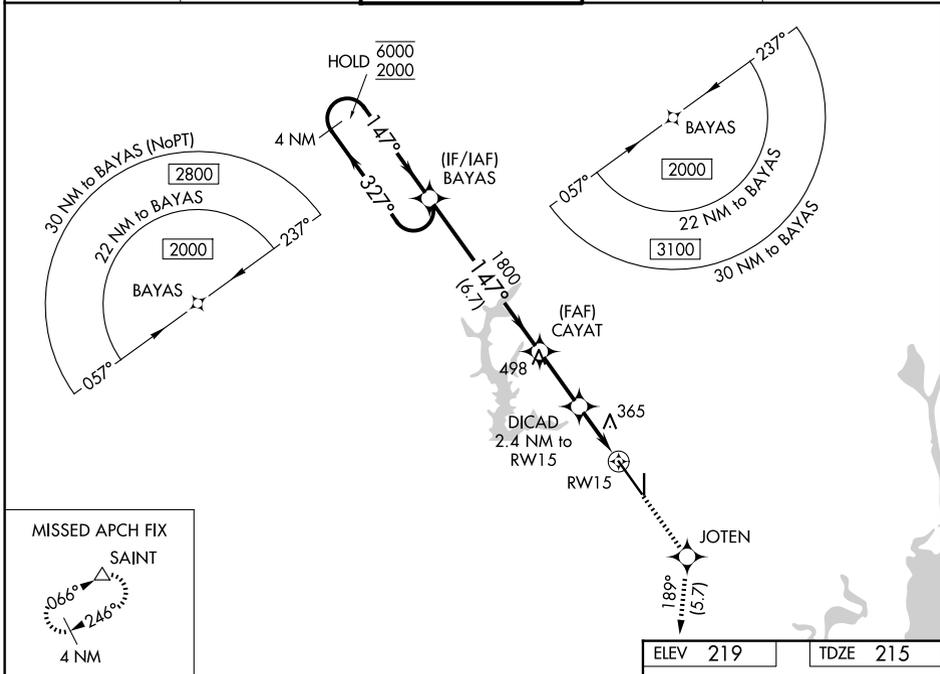


VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 50).

4 NM Holding Pattern BAYAS

2000 JOTEN tr 189° SAINT

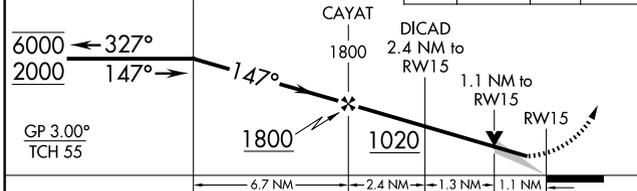

CATEGORY	A	B	C	D
LPV DA*		415/24	200 (200-½)	
LNAV/VNAV DA		636/45	421 (500-¾)	
LNAV MDA		620/40	405 (500-¾)	
CIRCLING	680-1	461 (500-1)	740-1½ 521 (600-1½)	780-2 561 (600-2)

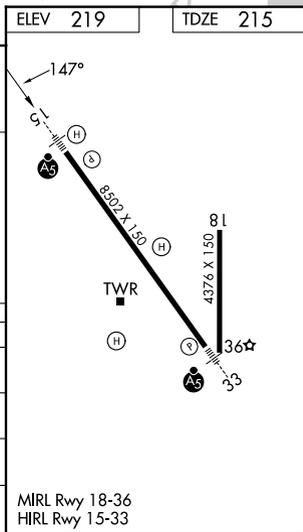

SE-4, 19 MAR 2026 to 16 APR 2026

SE-4, 19 MAR 2026 to 16 APR 2026