




LOC I-EZN 110.75	APP CRS 021°	Rwy Ldg TDZE Apt Elev	7601 587 599
----------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 2C

NASHVILLE INTL (BNA)

DME or RADAR required.		MALSR	MISSED APPROACH: Climb to 1300 then climbing left turn to 4000 on BNA VORTAC R-016 to TANDS/BNA 24.7 and hold.
<p>Simultaneous approach authorized. DME from BNA VORTAC. DME use requires simultaneous reception of I-EZN and BNA. For inop ALS, increase S-LOC 2C Cats C and D visibility to RVR 6000. *RVR 1800 authorized with use of FD or AP or HUD to DA.</p>			

D-ATIS 135.1	NASHVILLE APP CON 118.4 360.7 (030°-196°) 119.35 372.0 (197°-029°)	NASHVILLE TOWER 118.6 257.8	GND CON 121.9 348.6
------------------------	--	---------------------------------------	-------------------------------

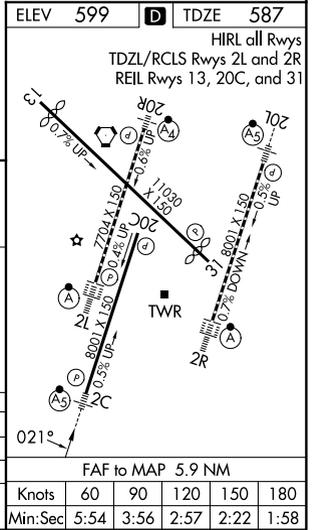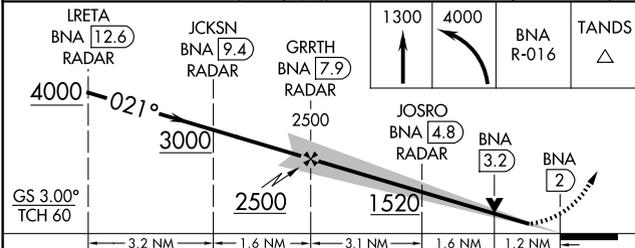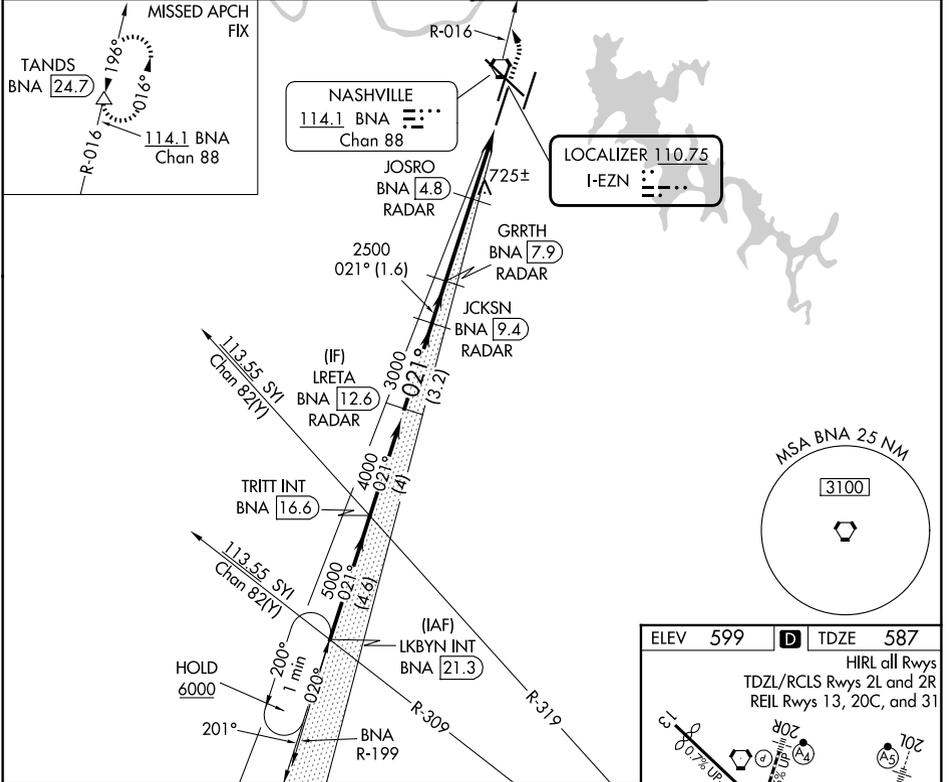

CATEGORY	A	B	C	D
S-ILS 2C*	787/24 200 (200-½)			
S-LOC 2C	980/24	393 (400-½)	980/35	393 (400-¾)
CIRCLING	1100-1 501 (600-1)	1120-1 521 (600-1)	1160-1½ 561 (600-1½)	1380-2½ 781 (800-2½)

SE-1, 19 MAR 2026 to 16 APR 2026

SE-1, 19 MAR 2026 to 16 APR 2026