

31DEC20

NASHVILLE SEVEN DEPARTURE

NASHVILLE, TENNESSEE  
NASHVILLE INTL (BNA)

**TOP ALTITUDE:  
4000**

**TAKEOFF MINIMUMS:**

Rwys 2C/R, 13: Standard.

Rwy 2L: Standard with minimum climb of 205' per NM to 2600.


Rwy 20L: Standard with minimum climb of 225' per NM to 2600.

Rwy 20C: Standard with minimum climb of 260' per NM to 2600.

Rwy 20R: Standard with minimum climb of 235' per NM to 2600.

Rwy 31: Standard with minimum climb of 240' per NM to 2600.

(NARRATIVE ON FOLLOWING PAGE)

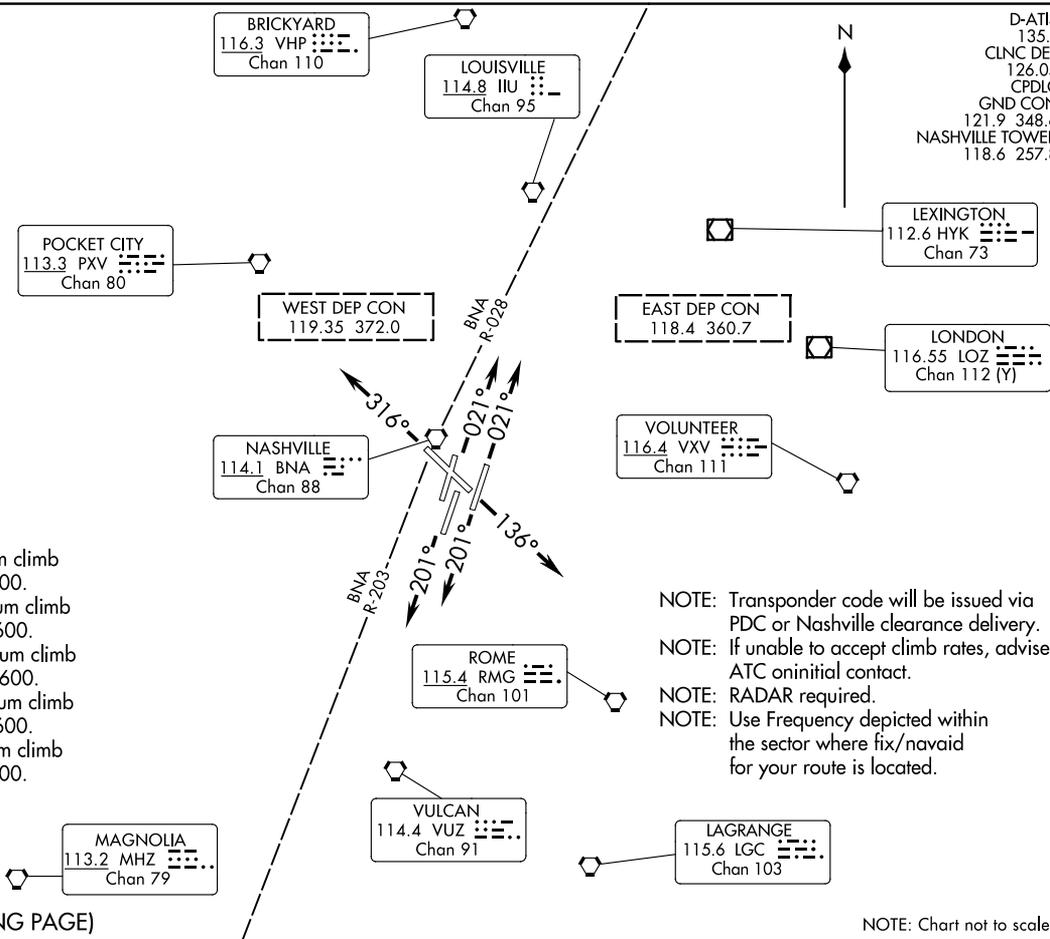

D-ATIS 135.1  
 CLNC DEL 126.05  
 CPDLC  
 GND CON 121.9 348.6  
 NASHVILLE TOWER 118.6 257.8

- NOTE: Transponder code will be issued via PDC or Nashville clearance delivery.
- NOTE: If unable to accept climb rates, advise ATC on initial contact.
- NOTE: RADAR required.
- NOTE: Use Frequency depicted within the sector where fix/navaid for your route is located.

NOTE: Chart not to scale.

25023  
NASHVILLE SEVEN DEPARTURE

AL-282 (FAA)

NASHVILLE INTL (BNA)  
NASHVILLE, TENNESSEE

# NASHVILLE SEVEN DEPARTURE



## DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 2L/C/R: Climb on heading 021° or assigned ATC heading, thence....

TAKEOFF RUNWAY 13: Climb on heading 136° or assigned ATC heading, thence....

TAKEOFF RUNWAYS 20L/C/R: Climb on heading 201° or assigned ATC heading, thence....

TAKEOFF RUNWAY 31: Climb on heading 316° or assigned ATC heading, thence....

....maintain 4000. Expect radar vectors and clearance to filed altitude within 5 minutes after departure.

SE-1, 19 MAR 2026 to 16 APR 2026

SE-1, 19 MAR 2026 to 16 APR 2026