

APP CRS	Rwy Ldg	8000
021°	TDZE	590
	Apt Elev	599

RNAV (RNP) Z RWY 2R

NASHVILLE INTL (BNA)

RNP AR APCH - GPS. Authorization required. From WAMAR, ZODKA, MUUSC, or AMAND: RF

▼ For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 54°C. Simultaneous approach authorized with Rwy 2L/C. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 5500 and RNP 0.3 all Cats visibility to 6000.

ALSF-2




MISSED APPROACH: Climb to 1300 then climbing right turn to 4000 direct LENON and hold.

D-ATIS
135.1

NASHVILLE APP CON
118.4 360.7 (030°-196°)
119.35 372.0 (197°-029°)

NASHVILLE TOWER
118.6 257.8

GND CON
121.9 348.6

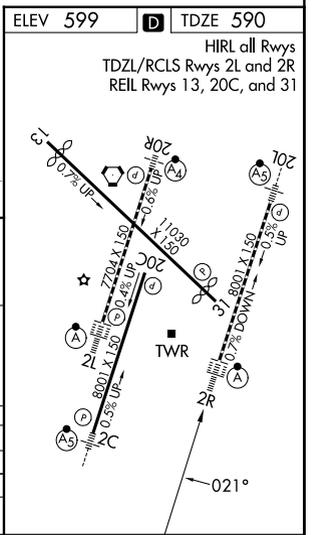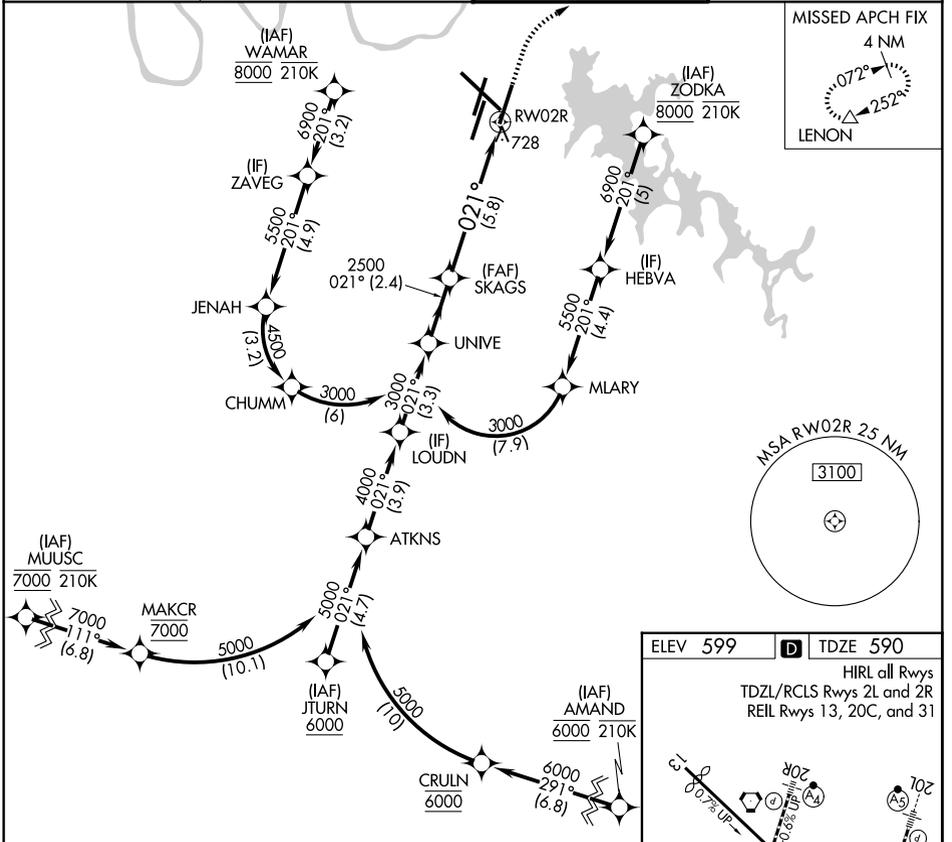

See planview for multiple IF locations.

	UNIVE	SKAGS	1300	4000	LENON
	3000	2500			
	021°				
	2500				
	2.4 NM		5.8 NM		
GP 3.00°	TCH 55				
CATEGORY	A	B	C	D	
RNP 0.15 DA		938/30	348 (400- ⁵ / ₈)		
RNP 0.30 DA		994/40	404 (400- ³ / ₄)		

AUTHORIZATION REQUIRED

SE-1, 19 MAR 2026 to 16 APR 2026

SE-1, 19 MAR 2026 to 16 APR 2026