WAAS CH 42713 W02A	APP CRS 021°	Rwy Ldg 7702 TDZE 599 Apt Elev 599

RNAV (GPS) Y RWY 2L
NASHVILLE INTL (BNA)

RNP APCH - GPS.

LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5500.

ALSF-2

MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct BEVEE and hold.

D-ATIS	NASHVILLE APP CON	NASHVILLE TOWER	GND CON
135.1	118.4 360.7 (030°-196°) 119.35 372.0 (197°-029°)	118.6 257.8	121.9 348.6

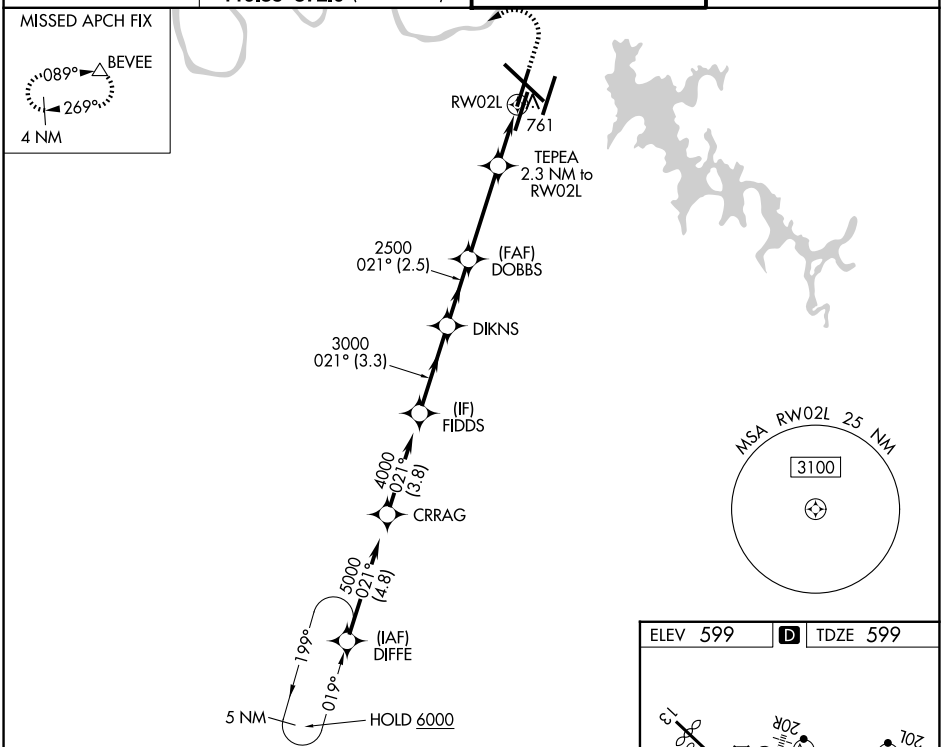

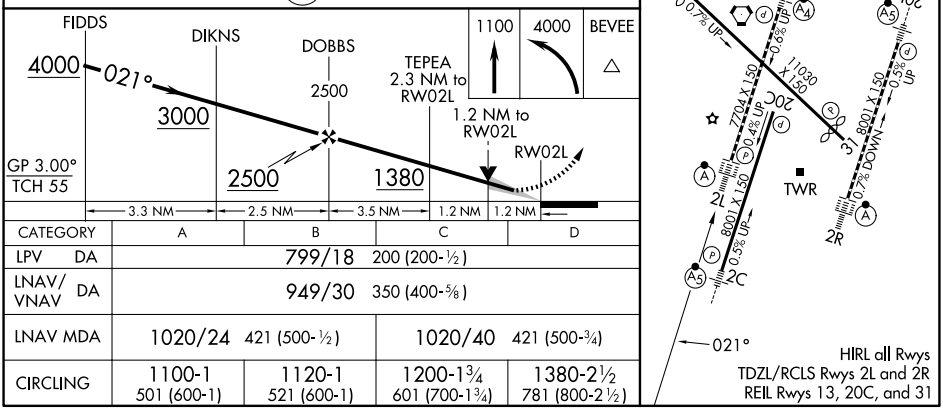

CATEGORY	A	B	C	D
LPV DA	799/18 200 (200-½)			
LNAV/VNAV DA	949/30 350 (400-⅝)			
LNAV MDA	1020/24 421 (500-½)		1020/40 421 (500-¾)	
CIRCLING	1100-1 501 (600-1)	1120-1 521 (600-1)	1200-1¾ 601 (700-1¾)	1380-2½ 781 (800-2½)

SE-1, 19 MAR 2026 to 16 APR 2026