# SNIDR TWO DEPARTURE (RNAV)

**TOP ALTITUDE: ASSIGNED BY ATC**

RNAV 1 - DME/DME/IRU or GPS.
RADAR required for non-GPS equipped aircraft.
RADAR required.

TAKEOFF MINIMUMS
Rwys 15L/R, 33L/R: Standard.

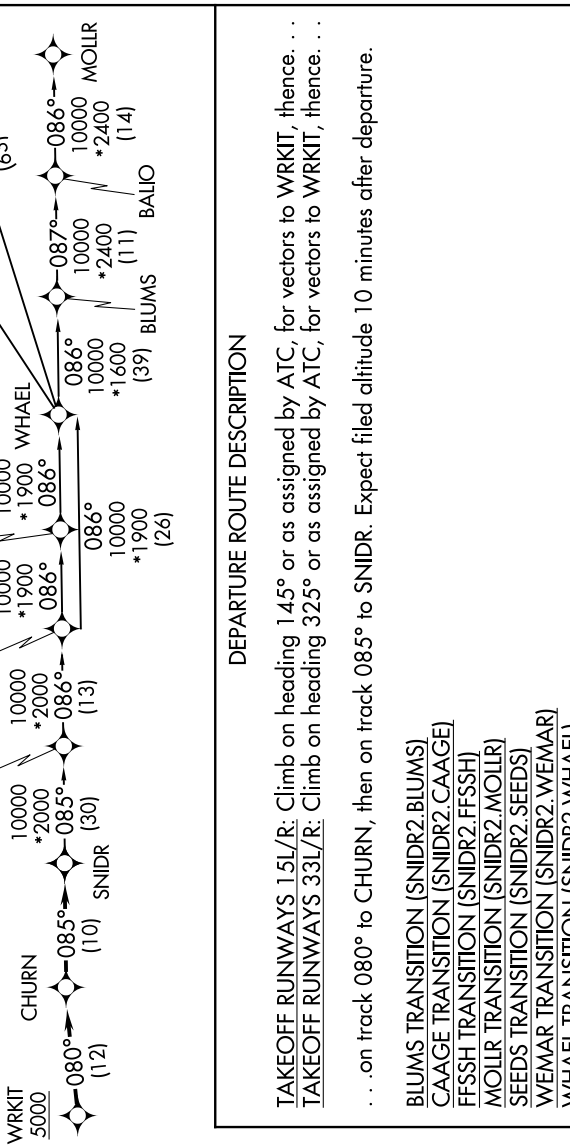


NOTE: Chart not to scale.

SAN ANTONIO DEP CON
127.1 290.225
ATIS ★
290.525
ATIS (HANGOVER) ★
327.8
CLNC DEL (15L-33R)
338.35
GND CON
119.65 275.8
GND CON (HANGOVER)
124.75 353.75
TOWER ★
128.25 294.7
HANGOVER TOWER ★
120.5 291.1

## DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 15L/R: Climb on heading 145° or as assigned by ATC, for vectors to WRKIT, thence. . .
TAKEOFF RUNWAYS 33L/R: Climb on heading 325° or as assigned by ATC, for vectors to WRKIT, thence. . .

. . .on track 080° to CHURN, then on track 085° to SNIDR. Expect filed altitude 10 minutes after departure.

BLUMS TRANSITION (SNIDR2.BLUMS)
CAAGE TRANSITION (SNIDR2.CAAGE)
FFSSH TRANSITION (SNIDR2.FFSSH)
MOLLR TRANSITION (SNIDR2.MOLLR)
SEEDS TRANSITION (SNIDR2.SEEDS)
WEMAR TRANSITION (SNIDR2.WEMAR)
WHAEL TRANSITION (SNIDR2.WHAEL)
WYLSN TRANSITION (SNIDR2.WYLSN)