

APP CRS	Rwy Ldg	6869
007°	TDZE	14
	Apt Elev	14

RNAV (RNP) RWY 1

RONALD REAGAN WASHINGTON NTL (DCA)

▽ For uncompensated Baro-VNAV systems, procedure NA below -10°C (14°F) or above 48°C (120°F). RF required. GPS required. Missed approach requires RNP less than 1.0. For inop ALS, increase RNP 0.30 all Cats visibility to 1¼ mile.


ALSF-2
 MISSED APPROACH: (Do not exceed 185K until FIVUD) Climb to 2200 left turn to FIVUD and on track 327° to HESLO and on track 327° to GTN NDB and hold.

D-ATIS	132.65
--------	---------------


POTOMAC APP CON	
119.85	239.25 (W/S)
124.2	360.8 (E)

WASHINGTON TOWER	
119.1	257.6

GND CON	
121.7	257.6

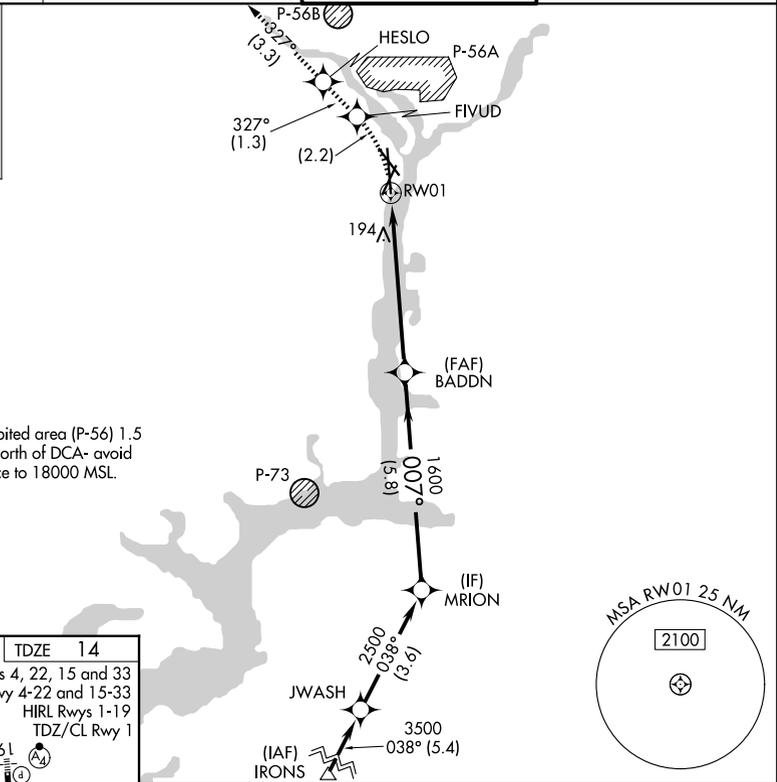

ELEV 14	D	TDZE 14
REIL Rwys 4, 22, 15 and 33		
MIRL Rwy 4-22 and 15-33		
HIRL Rwys 1-19		
TDZ/CL Rwy 1		

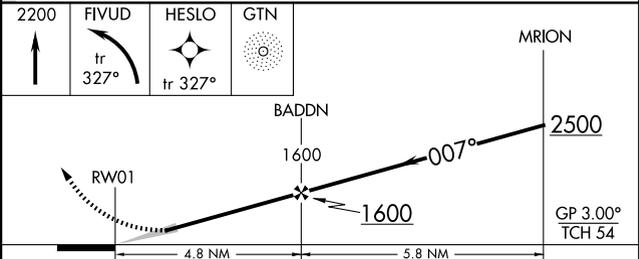

CATEGORY	A	B	C	D
RNP 0.30 DA	552/60		538 (600-1¼)	

AUTHORIZATION REQUIRED

NE-3, 19 MAR 2026 to 16 APR 2026

NE-3, 19 MAR 2026 to 16 APR 2026