


WAAS CH 40405 W09A	APP CRS 093°	Rwy Ldg 4801 TDZE 3 Apt Elev 3
--	------------------------	---

RNAV (GPS) RWY 9

KEY WEST INTL (EYW)

RNP APCH-GPS.		MISSED APPROACH: Climb to 2000 direct BURPY and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 12°C or above 54°C. Rwy 9 helicopter visibility reduction below 3/4 SM NA. Baro-VNAV and VDP NA when using NQX altimeter setting. When local altimeter setting not received, use NQX altimeter setting.		

ATIS 119.675	NAVY KEY WEST APP CON * 124.025 313.7	KEY WEST TOWER * 118.2 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
------------------------	---	---	-------------------------	-------------------------

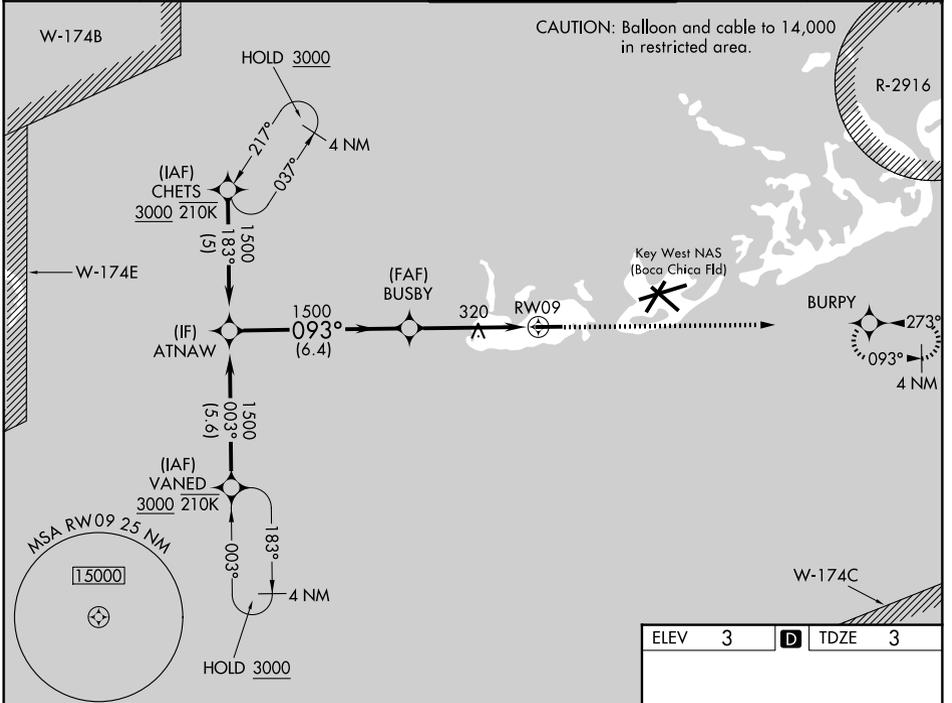

SE-3, 19 MAR 2026 to 16 APR 2026

SE-3, 19 MAR 2026 to 16 APR 2026

ELEV 3		D TDZE 3	
ATNAW 1500 — 093° —		BUSBY 1500	
GP 3.00° TCH 35		1.7 NM to RW09	
6.4 NM		2.9 NM	
1.7 NM		RW09	
2000 BURPY		093°	
TWR		5076 X 100	
CATEGORY	A	B	C
LPV DA	253-1 250 (300-1)		
LNAV/VNAV DA	425-1 422 (500-1 1/4)		
LNAV MDA	580-1 577 (600-1)	580-1 577 (600-1 1/8)	
CIRCLING	580-1 577 (600-1)	620-1 617 (700-1 1/4)	620-2 617 (700-2)