



LOC/DME I-CIZ 110.15 Chan 38 (Y)	APP CRS 186°	Rwy Ldg 10000 TDZE 889 Apt Elev 896
--	------------------------	--



ILS or LOC RWY 18L

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP APCH - GPS. From BYRAN, CRSLY, LEWIN, or NXHAL. DME or RADAR required. RADAR required for procedure entry at SPUDR.	MALSR 	MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 on heading 120° and FLM VOR/DME R-339 to FLM VOR/DME and hold.
Simultaneous approach authorized. For inop ALS, increase S-LOC 18L Cat C and D visibility to 1 1/8 SM.		
D-ATIS 134.375	CINCINNATI APP CON 119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)	CINCINNATI TOWER 118.975 360.85 (18L/36R) 118.3 (9/27, 18C/36C) 133.325 (18R/36L)
		GND CON 121.7

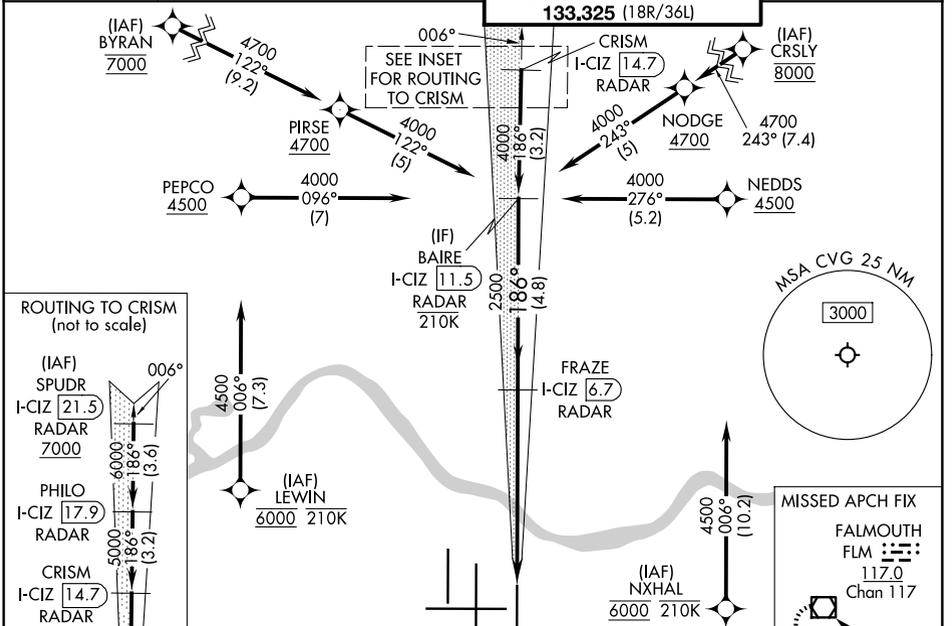

ELEV 896	D	TDZE 889
----------	----------	----------

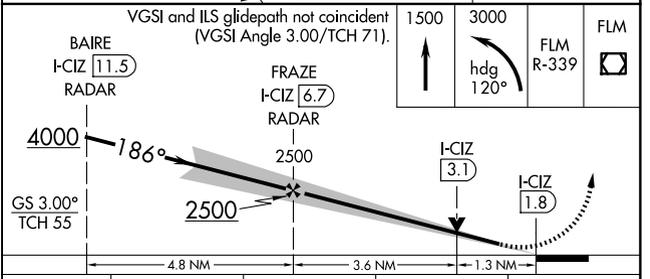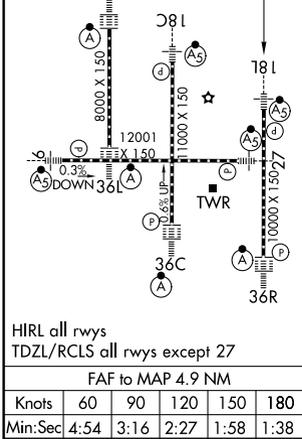

CATEGORY	A	B	C	D
S-ILS 18L	1089/18 200 (200-1/2)			
S-LOC 18L	1360/24	471 (500-1/2)	1360/50	471 (500-1)
CIRCLING	1460-1	564 (600-1)	1560-1 3/4 664 (700-1 3/4)	1560-2 664 (700-2)

SE-1, 19 MAR 2026 to 16 APR 2026

SE-1, 19 MAR 2026 to 16 APR 2026