


WAAS CH 49099 W36A	APP CRS 006°	Rwy Ldg TDZE Apt Elev	8000 873 896
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 36L


CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP APCH - GPS. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. Use of FD or AP required during simultaneous operations. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5500 and LNAV Cats C and D visibility to 5500.	ALSF-2 	MISSED APPROACH: Climb to 3000 direct KRTHY and on 329° track to BATHY and hold.
---	------------	--

D-ATIS 134.375	CINCINNATI APP CON 119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)	CINCINNATI TOWER 118.975 360.85 (18L/36R) 118.3 (9/27, 18C/36C) 133.325 (18R/36L)	GND CON 121.7
--------------------------	--	---	-------------------------

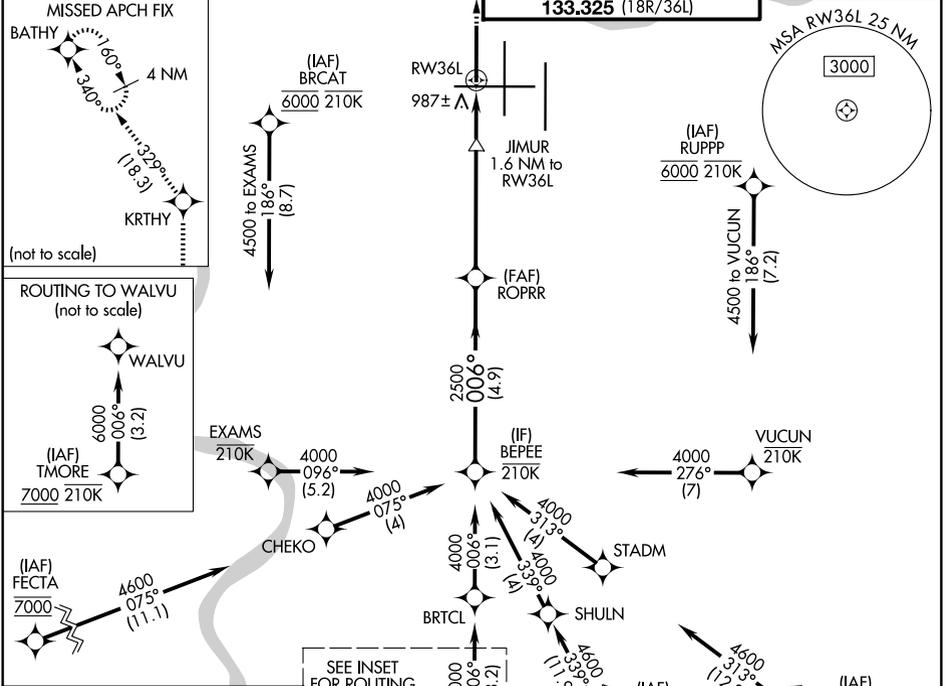

ELEV 896	D	TDZE 873
----------	----------	----------

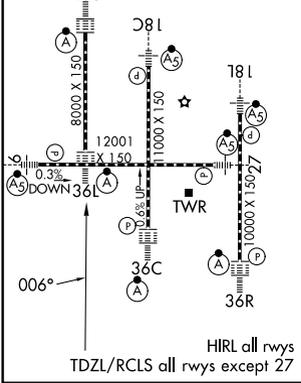

BEPEE	ROPRR	JIMUR 1.6 NM to RW36L	3000 KRTHY	tr 329°	BATHY
4000	2500	1440	1 NM to RW36L		RW36L
GP 3.00°	TCH 55	4.9 NM	3.3 NM	0.7 NM	1 NM
CATEGORY	A	B	C	D	
LPV DA	DA	1073/18	200 (200-½)		
LNAV/VNAV	DA	1240/35	367 (400-⅔)		
LNAV MDA	1240/24	367 (400-½)	1240/35	367 (400-⅔)	
CIRCLING	1460-1	564 (600-1)	1560-1¾ 664 (700-1¾)	1560-2 664 (700-2)	

SE-1, 19 MAR 2026 to 16 APR 2026

SE-1, 19 MAR 2026 to 16 APR 2026