


LOC/DME FAS 110.3 Chan 40	APP CRS 259°	Rwy Ldg 26R 26L 2638 10526 2067 2069 2181 2181
----------------------------------------	------------------------	------------------------------------------------------------

ILS Z or LOC Z RWY 26R


HARRY REID INTL (LAS)

⚠ For inop ALS, increase S-ILS-26R all Cats visibility to ½ SM, S-LOC-26R Cat E visibility to 1 ¾ SM. Inop table does not apply to sidestep 26L.




MISSED APPROACH: Climb to 3200 then climbing right turn to 6000 on heading 079° and on BLD R-287 to BLD VORTAC and hold, continue climb-in-hold to 6000.

D-ATIS 132.4	LAS VEGAS APP CON 125.025 379.15 (West) 119.775 282.2 (East)	LAS VEGAS TOWER 118.75 257.8 (Rwy 1L/19R, 1R/19L) 119.9 257.8 (Rwy 8L/26R, 8R/26L)	GND CON 121.1 270.8 E of 1R/19L 121.9 254.3 W of 1L/19R	CLNC DEL 118.0	CPDLC
------------------------	----------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------	--------------------------	-------

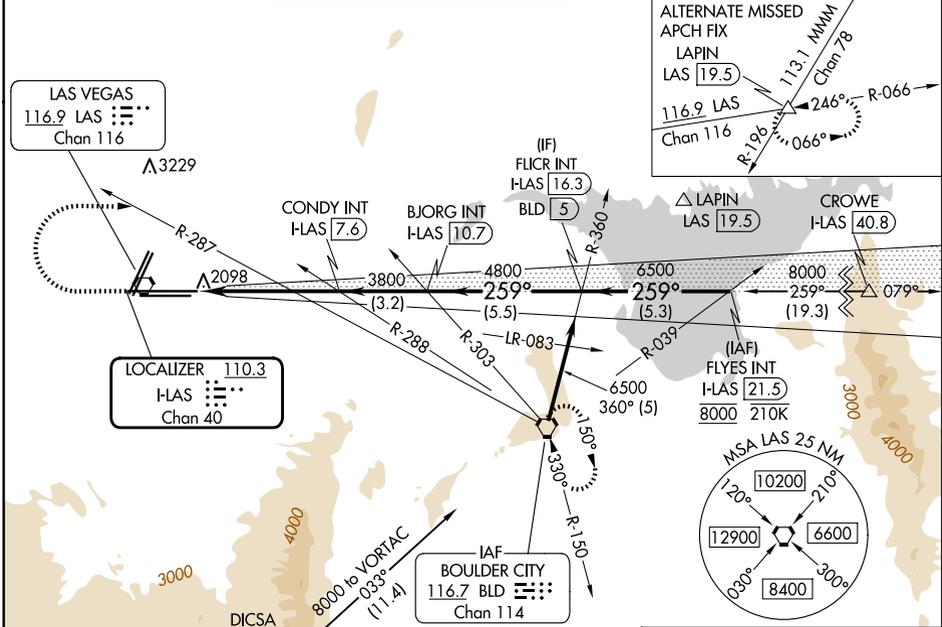


Procedure NA for arrivals on BLD VORTAC airway radials 332 CW 016.

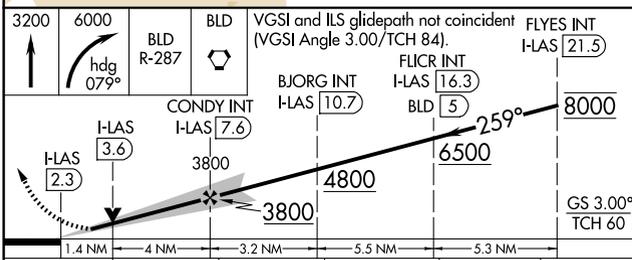

CATEGORY	A	B	C	D	E
S-ILS 26R	2334-¾ 267 (200-¾)				
S-LOC 26R	2560-¾ 493 (400-¾)	2560-1½ 493 (400-1½)			
SIDESTEP 26L	2560-1 491 (400-1)	2560-1½ 491 (400-1½)	2560-2 491 (400-2)		
CIRCLING	3020-1¼ 839 (900-1¼)	3060-1¼ 879 (900-1¼)	3100-2¾ 919 (1000-2¾)	3540-3 1359 (1400-3)	

ELEV 2181	TDZE 26R 2067	TDZE 26L 2069
-----------	---------------	---------------



MIRL Rwy 1R-19L	REIL Rwys 1R, 8R, 19L and 19R	HIRL Rwys 1L-19R, 8L-26R and 8R-26L
FAF to MAP 5.3 NM		
Knots	60	90 120 150 180
Min:Sec	5:18	3:32 2:39 2:07 1:46

SW-4, 19 MAR 2026 to 16 APR 2026

SW-4, 19 MAR 2026 to 16 APR 2026