

| | | | |
|-------------------------|------------------------|-----------------------------|---------------------------------------|
| WAAS CH 77711 | APP CRS 130° | Rwy Ldg TDZE Apt Elev | 6144 10 10 |
| W13A | | | |

RNAV (GPS) RWY 13


ST AUGUSTINE (SGJ)

RNP APCH


▼ Baro-VNAV NA when using Jacksonville NAS (Towers Fld) altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Rwy 13 helicopter visibility reduction below ¼ SM NA. When local altimeter setting not received, use Jacksonville NAS (Towers Fld) altimeter setting; increase all DA 57 feet and all MDA 60 feet. Increase LPV and LNAV/VNAV all Cats, LNAV Cat C and Circling Cat C/D visibility ½ SM. Circling Rwy 2, 6 NA at night.

MISSED APPROACH:
Climb to 2000 direct YUTKA and hold.

| | | | | |
|------------------------|---------------------------------------|---|-----------------------------------|-------------------------|
| ATIS 119.625 | JACKSONVILLE APP CON 120.75 | ST AUGUSTINE TOWER ★ 127.625 (CTAF) 269.475 | GND CON 121.175 251.125 | UNICOM 122.95 |
|------------------------|---------------------------------------|---|-----------------------------------|-------------------------|

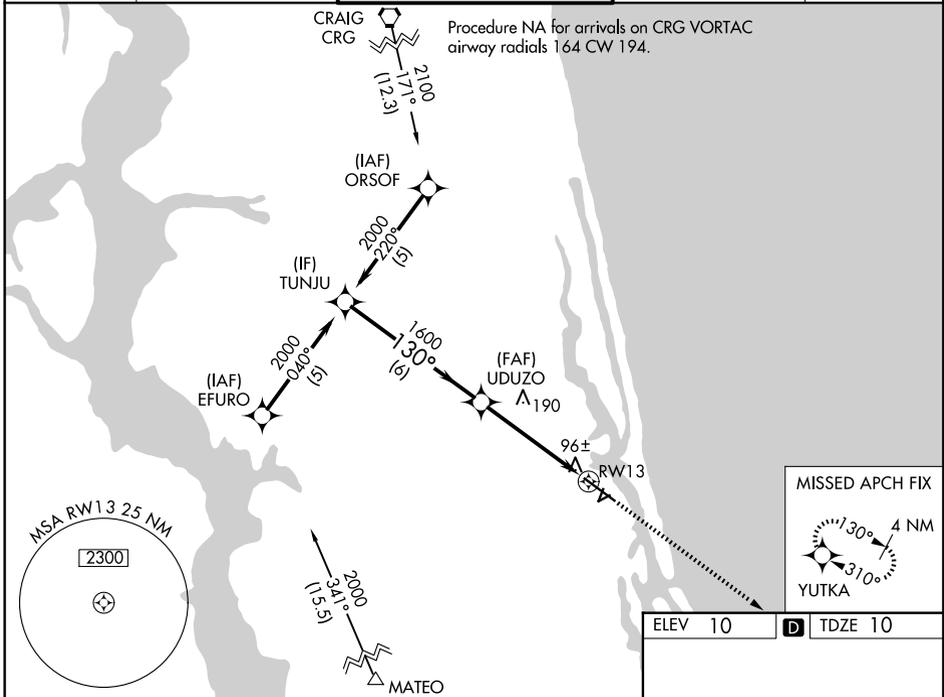

| | | | | |
|-------------------|----------------------|--|------------------------|------------------------|
| Procedure Turn NA | TUNJU | VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 44). | | 2000 YUTKA |
| GP 3.00° TCH 58 | | | | |
| CATEGORY | A | B | C | D |
| LPV DA | | 357-1¼ | 347 (400-1¼) | |
| LNAV/ VNAV DA | | 391-1¼ | 381 (400-1¼) | |
| LNAV MDA | 460-1 | 450 (500-1) | 460-1¼ 450 (500-1¼) | 460-1½ 450 (500-1½) |
| CIRCLING | 520-1 510 (600-1) | 580-1 570 (600-1) | 660-1¾ 650 (700-1¾) | 780-2½ 770 (800-2½) |

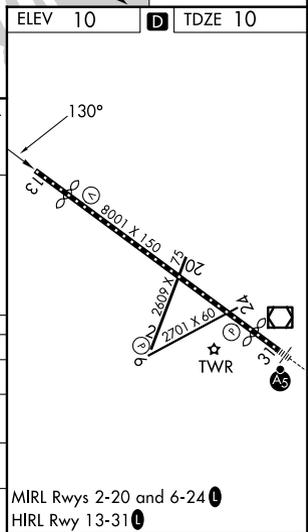

SE-3, 19 MAR 2026 to 16 APR 2026

SE-3, 19 MAR 2026 to 16 APR 2026