


| | | | |
|---|------------------------|-----------------------------|---|
| VOR/DME OSH 116.75 Chan 114 (Y) | APP CRS 360° | Rwy Ldg TDZE Apt Elev | 8002 809 809 |
|---|------------------------|-----------------------------|---|



VOR RWY 36
WITTMAN RGNL (OSH)

| | | |
|--|--------------|---|
| <p>⚠ Circling to Rwy 5, 13, 23, 31 NA at night. When local altimeter setting not received, use FLD altimeter setting and increase all MDAs 40 feet and S-36 visibility Cats C and D 1/8 SM. LAUDE fix minimums: increase S-36 visibility Cats C and D to RVR 5500. For inop ALS, increase LAUDE fix minimums S-36 Cats C and D visibility to 1/8 SM. VDP NA with FLD altimeter setting.</p> | <p>MALSR</p> | <p>MISSED APPROACH: Climbing right turn to 3000 on OSH VOR/DME R-111 to LEWKO INT/ OSH 15.1 DME and hold.</p> |
| | | |

| | | | | |
|----------------------|---|--|-------------------------|-------------------------|
| ATIS 125.9 | MILWAUKEE APP CON 127.0 263.075 | OSHKOSH TOWER ★ 118.5 (CTAF) 290.9 | GND CON 132.3 | UNICOM 122.95 |
|----------------------|---|--|-------------------------|-------------------------|

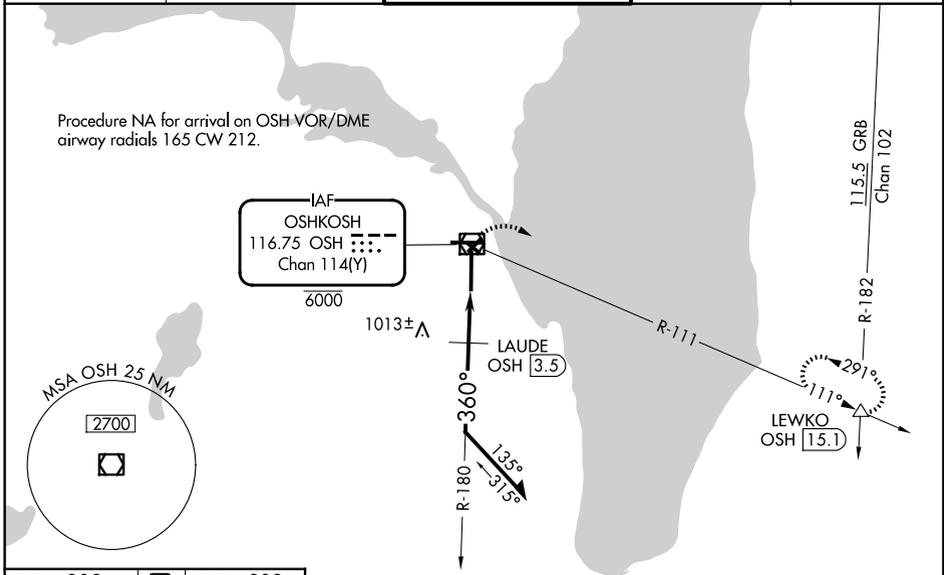

| | | |
|-----------------|----------|-----------------|
| ELEV 809 | D | TDZE 809 |
|-----------------|----------|-----------------|

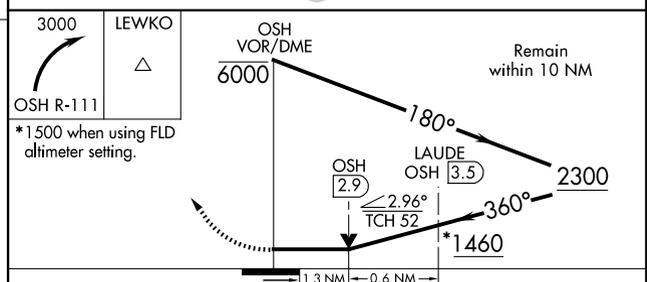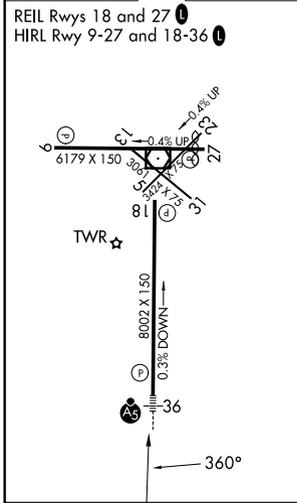

| CATEGORY | A | B | C | D |
|-----------------------------------|-------------|---------------|----------------|----------------|
| S-36 | 1460/24 | 651 (700-1/2) | 1460-13/8 | 651 (700-13/8) |
| CIRCLING | 1460-1 | 651 (700-1) | 1460-17/8 | 1460-2 |
| | | | 651 (700-13/8) | 651 (700-2) |
| LAUDE FIX MINIMUMS (DME REQUIRED) | | | | |
| S-36 | 1280/24 | 471 (500-1/2) | 1280/50 | 471 (500-1) |
| CIRCLING | 1280-1 | 1300-1 | 1360-11/2 | 1440-2 |
| | 471 (500-1) | 491 (500-1) | 551 (600-1/2) | 631 (700-2) |