

WAAS CH 48823 W31A	APP CRS 308°	Rwy Idg 4102 TDZE 403 Apt Elev 403
----------------------------------------	------------------------	---------------------------------------------------------------


RNAV (GPS) RWY 31

LANCASTER (LNS)

⚠ Night landing: Rwy 13, 31 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Harrisburg Intl altimeter setting and increase all DA 64 feet and all MDA 80 feet, increase LNAV/VNAV visibility all Cats and LNAV and Circling Cat C/D visibility ¼. Baro-VNAV NA when using Harrisburg Intl altimeter setting.

MISSED APPROACH:
Climb to 3000 direct CERNI and on track 348° to KUPPS and hold.


ATIS 125.675	HARRISBURG APP CON 126.45 281.525	LANCASTER TOWER ★ 120.9 (CTAF) 251.1	GND CON 121.8	UNICOM 122.95
------------------------	---------------------------------------------	------------------------------------------------	-------------------------	-------------------------

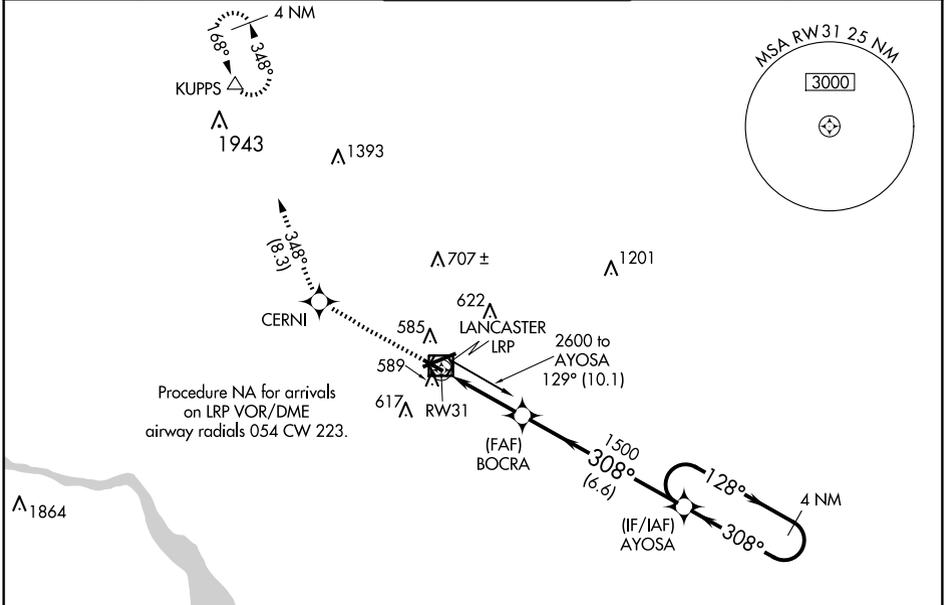

NE-4, 19 MAR 2026 to 16 APR 2026

NE-4, 19 MAR 2026 to 16 APR 2026

ELEV 403	D	TDZE 403
-----------------	----------	-----------------

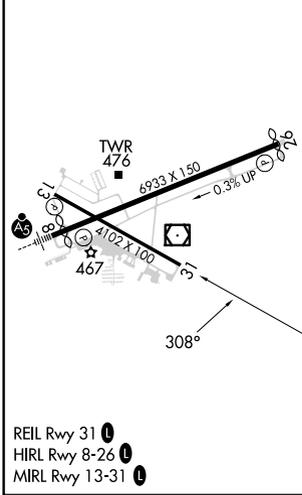

3000	CERNI	tr 348°	KUPPS	AYOSA	4 NM Holding Pattern
	RW31	BOCRA 1500		2600	GP 3.00° TCH 37
	3.3 NM	6.6 NM			
CATEGORY	A	B	C	D	
LPV DA	DA	653-1	250 (300-1)		
LNAV/VNAV DA	DA	774-1¼	371 (400-1¼)		
LNAV MDA	840-1	437 (500-1)	840-1⅓	437 (500-1⅓)	
CIRCLING	940-1	537 (600-1)	960-1½	1060-2	657 (700-2)