

| | | | |
|----------------------------------------|------------------------|-----------------------------|---------------------------------------|
| WAAS CH 42607 W36A | APP CRS 004° | Rwy Idg TDZE Apt Elev | 5003 36 39 |
|----------------------------------------|------------------------|-----------------------------|---------------------------------------|

RNAV (GPS) RWY 36

FALSE RIVER RGNL (HZR)

RNP APCH

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using Baton Rouge altimeter setting. When local altimeter setting not received, use Baton Rouge altimeter setting and increase all DA 51 feet and all visibility 1/8 SM; increase all MDA 60 feet, and LNAV Cat C/D visibility 1/8 SM and Circling Cat C visibility 1/4 SM. For inop ALS, increase LNAV/VNAV Cats A/B visibility to 7/8 mile. For inop ALS when using Baton Rouge altimeter setting, increase LNAV/VNAV visibility to 1 SM and LNAV Cat C/D visibility to 1 1/8 SM.

ODALS






MISSED APPROACH:
Climb to 2300 direct FENPU and hold.

AWOS-3PT
121.250

BATON ROUGE APP CON*
120.3 278.3

UNICOM
122.8 (CTAF)

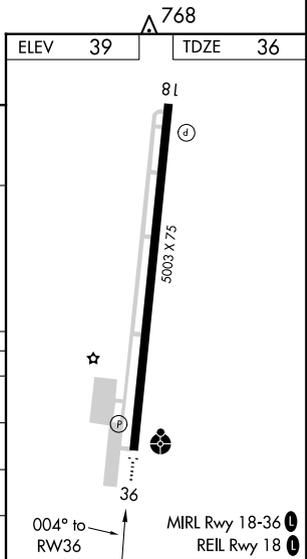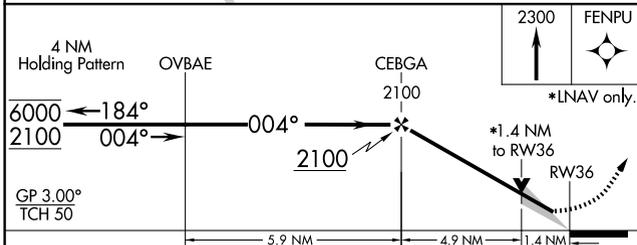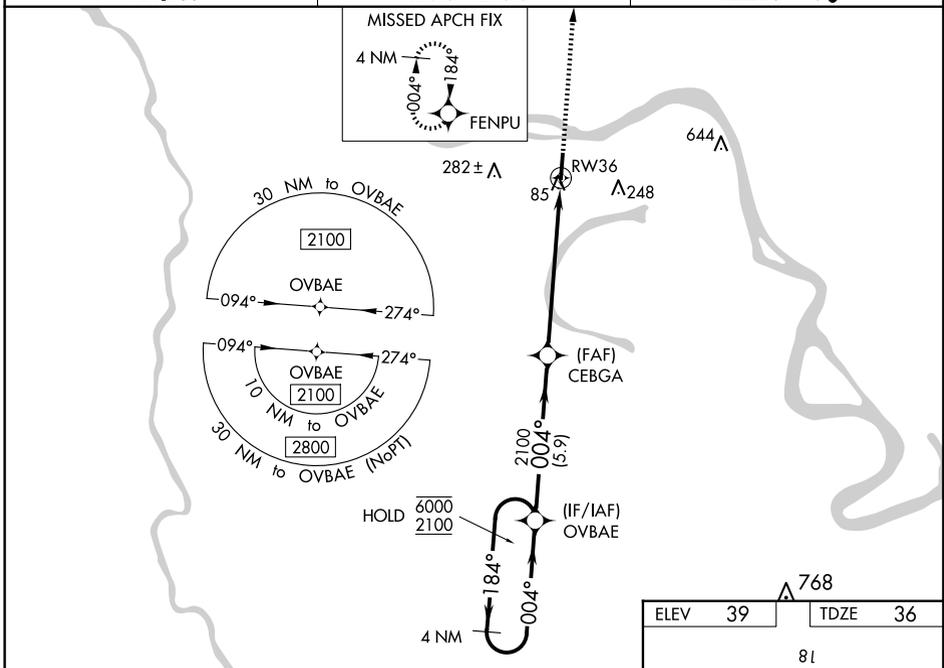

| CATEGORY | A | B | C | D |
|--------------|--------------------------|----------------------|------------------------------|----------------------|
| LPV DA | | 286-3/4 | 250 (300-3/4) | |
| LNAV/VNAV DA | | 307-3/4 | 271 (300-3/4) | |
| LNAV MDA | 520-3/4 484 (500-3/4) | 520-1 484 (500-1) | 520-1 1/4 484 (500-1 1/4) | 484 (500-1 1/4) |
| CIRCLING | 520-1 481 (600-1) | | 600-1 1/2 561 (600-1 1/2) | 600-2 561 (600-2) |

SC-4, 19 MAR 2026 to 16 APR 2026

SC-4, 19 MAR 2026 to 16 APR 2026